

# CROWN

WWW.CROWN-TOOLS-EU.COM

# PRODUCTS CATALOG

PROFESSIONAL POWER TOOLS AND EQUIPMENT



# 2024



# **MERIT LINK**

Hardware tools and equipment

FOR THE ONES  
WHO NEED  
SOLUTIONS





# MERIT LINK GROUP

Merit Link is an industrial internet group which combines **synergy on distribution, brands, R&D and production for hardware tools and equipments**.

Inspired by **"Tool for a better life"**, we create essential tools to make people's lives more convenient and enjoyable.

Merit Link is aiming to become an **international alliance service platform**, which can leverage the business scale by offering transparent customer oriented services to consumers, shop owners, distributors, brand operators and manufacturers.

The **headquarter of the group is located in Shanghai**, and are strategically surrounded by other operation centers, including **Design Center in Switzerland, Training, Logistic, R&D and manufacture Complex in Jinhua, Purchasing & Sales Center in South-west China**, etc.

Benefit from penetrating into market around "the Silk Road Economic Belt and the 21st-Century Maritime Silk Road" during long time, the group established a **chain service system** offering **international resources, customer-oriented services, multi-category products, professional training and e-commerce services**.

Merit Link business model's core is the complete service system based on 5 pillars: warehouse, logistic and after-sales services, product training, promotion and marketing activities, talent development and e-commerce platform.

Merit Link Brands portfolio offer **in house Brands, agent Brands and famous Brands**. In house portfolio includes well-known brands such as **Crown, DWT, Tosan and Mytol**.

Through long-time partnering with distributors in overseas markets, the group obtained strong influence in the markets such as **China and South-east Asia, Middle-East and Africa, C.I.S. and Middle Europe**.


Merit Link boosts its mission as **"Meet the consumer`s needs with best products and services by integrating resources across the industrial chains"**. With all of our brands, businesses, and people working in unison, we can create scale advantages by allocating resources more strategically and efficiently.





# OUR MISSION

A MANUFACTURER'S EXPERIENCE,  
THE STRENGTH OF OUR BRAND, OUR NUMBERS.

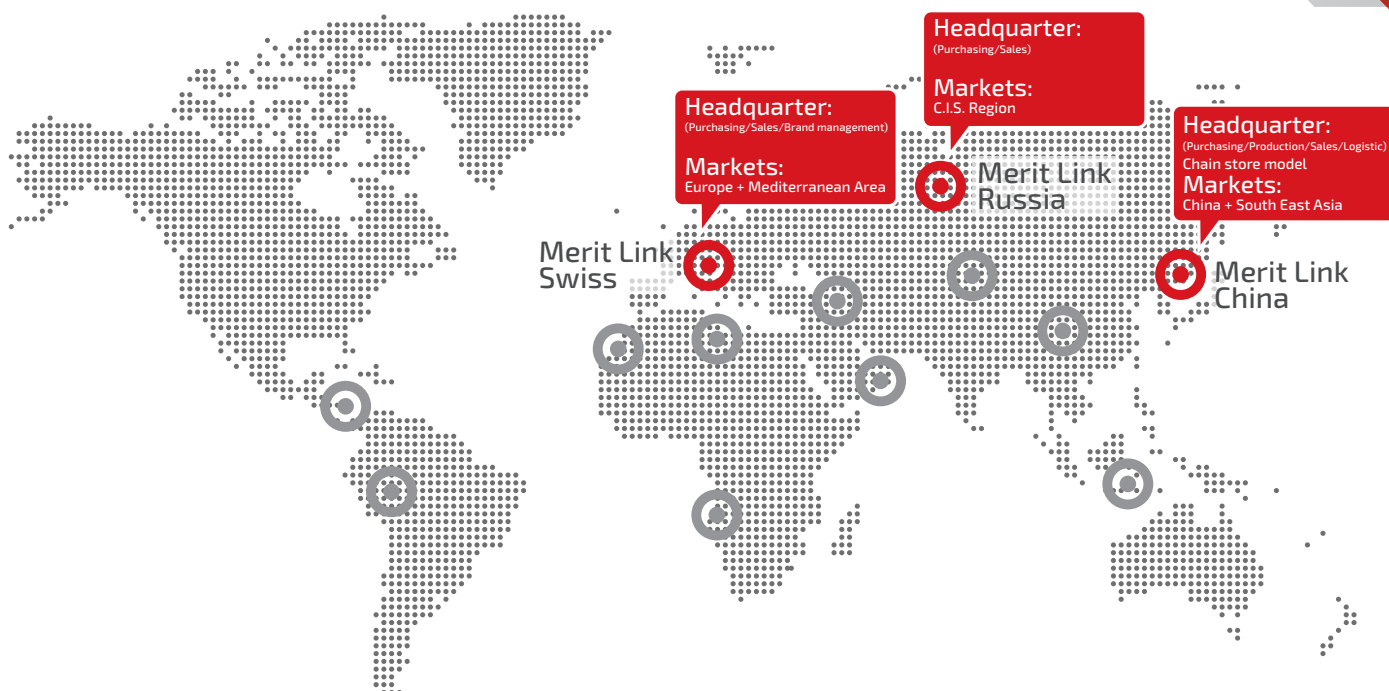

## 4 FACTORIES

We have been designing and developing high-performance power tools since 1980. Our engineers are constantly developing our product range to always offer the best tools for every application. In our 4 plants we manufacture according to the most current international standards pursuing continuous improvement in performance, balance, versatility and longevity of our power tools.

## +1.500 EMPLOYEES

CROWN is a global company with over 1,500 employees worldwide who work every day to develop and improve our international business. All departments and professionals involved, work with the specific goal of making the best products and services that ensure professionals can work in the most productive way.

## 105.000 m<sup>2</sup>

Our production facilities are spread over more than 105,000 square meters allowing us to manage the entire production system effectively, from component storage, to production, to finished product storage.

## 10 MILLIONS OF PRODUCTS

CROWN produces 10 million power tools annually. Our assortment is produced following strict quality controls throughout the supply chain. From supply control to production management through TPS logics.

## 50+ NATIONS

CROWN is present in more than 50 countries worldwide and our market share is growing rapidly year after year. We develop our markets directly through directly controlled companies thus shortening the distribution chain and always ensuring the best service and support to our customers.



# CROWN ONLINE

ALL INFORMATION JUST A CLICK AWAY.

[WWW.CROWN-TOOLS-EU.COM](http://WWW.CROWN-TOOLS-EU.COM)



The CROWN website is an online showcase for our products but also a working tool for those in the industry. In addition to being able to view all the technical features and commercial details of our products, it is possible to download catalogs and promotional flyers, access the service section where instruction manuals can be consulted, and the restricted area where various multimedia content for marketing needs can be downloaded.

## News

Stay up-to-date about CROWN news by browsing our home page.

## Technical specifications

On the CROWN website you can find all the details about the technical performance and main functions of our products.

## Catalogs and fliers

View online and download the latest version of the product catalog and promotional flyers.

## Usage applications

With the compare function you can compare the performance of our products and choose the one best suited to your needs.

## Documentation

Download the user manual and exploded view drawing directly from the service section or on the product page:

[www.crown-tools-service.com](http://www.crown-tools-service.com)

## Reserved area

A dedicated area for distributors where they can download all sales support communication materials.

## YouTube channel

Visit our youtube channel and subscribe to view in-depth videos on our product range.

**You Tube**

Subscribe to our channel





# CONTENTS

## POWER TOOLS: BATTERY RANGE

**7**

Battery tools  
3,6V e 12V

**10**

Fastening, drilling  
and hammering  
20V Max

**16**

Metal working  
20V Max

**17**

Wood working  
20V Max

**19**

Various tools  
20V Max

**20**

Outdoor tools  
20V Max

**22**

Batteries and  
chargers  
20V Max

**24**

Cases and bags  
20V Max

## POWER TOOLS: CORDED RANGE

**26**

Fastening  
and drilling

**29**

Hammers  
and breakers

**34**

Metal working

**40**

Cutting  
and sawing

**44**

Wood working

**47**

Various tools

**50**

Laser and digital  
measuring  
tools

**52**

Outdoor tools

**53**

Welding machines  
and compressors

## ACCESSORIES

**55**

Cutting, grinding  
and diamond discs

**56**

Sabre saw blades

**56**

Sanding papers  
and base plates

**57**

Blades for circular  
and plunge saws

**58**

Carbon brushes



CORDLESS SCREWDRIVER  
CT22053 TB

- 1/4" HEXAGONAL TOOL HOLDER
- VARIABLE TORQUE
- REVERSE FUNCTION
- SOFT GRIP
- USB-C CHARGING SOCKET

ACCESSORIES INCLUDED

USB cable, Magnetic holder, Bits: (25 mm) SL3, SL4, SL5, SL6 | (45 mm) SL3, SL5 | (25 mm) PZ1, PZ2, PZ3 | (25 mm) T10, T15, T20, T25, T30 | (45 mm) T20 | (25 mm) PH1, PH2, PH3 | (45 mm) PH1, PH2 | (25 mm) H2, H3, H4, H5, H6.



BATTERY CAPACITY	2 AH
BATTERY CHARGING TIME	60 MIN
NO-LOAD SPEED	260 MIN <sup>-1</sup>

TURNDOWN OF ROTATION TORQUE	5 NM
NUMBER OF STAGES OF ROTATION TORQUE	3
WEIGHT	0,28 KG

CORDLESS SCREWDRIVER  
CT22024 MC

- SPINDLE AUTOMATIC LOCKING
- 1/4" HEXAGONAL TOOL HOLDER
- VARIABLE TORQUE
- 2 MODES (SCREWDRIVING / DRILLING)
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED

Bits: SL2,5, 3, 4, 5, 6 mm, PH0, PH1, PH2, PH3, PH4, PZ0, PZ1, PZ2, PZ3, PZ4, H2, 3, 4, 5, 6 mm, T5, T6, T8, T10 (x2), T15 (x2), T20 (x2), T25, Extension 50 mm. Charger, Belt clip.



BATTERY CAPACITY	1,5 AH
BATTERY CHARGING TIME	3,5 H
NO-LOAD SPEED	200 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	6,35 MM
MAX. TORQUE	3,5 NM
MAX. SCREW DIAMETER	4 MM
WEIGHT	0,45 KG

CORDLESS SCREWDRIVER  
CT21072HBX-2 BMC

- SPINDLE AUTOMATIC LOCKING
- 1/4" HEXAGONAL TOOL HOLDER
- STEP SPEED SELECTION
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- QUICK CHARGE

ACCESSORIES INCLUDED

Batteries 2 pcs, Charger, Belt clip.



BATTERY CAPACITY	2 AH
BATTERY CHARGING TIME	60 MIN
NO-LOAD SPEED (GEAR I / II)	0-380 / 0-1250 MIN <sup>-1</sup>
TOOL HOLDER	1/4" HEXAGONAL
MAX. TORQUE (SOFT / HARD)	19 / 30 NM
MAX. SCREW DIAMETER	6 MM
WEIGHT	0,85 KG

CORDLESS DRILL AND SCREWDRIVER  
CT21072HX-2 BMC

- SPINDLE AUTOMATIC LOCKING
- KEYLESS CHUCK
- STEP SPEED SELECTION
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 2 MODES (SCREWDRIVING / DRILLING)
- QUICK CHARGE

ACCESSORIES INCLUDED

Batteries 2 pcs, Charger, Belt clip.



BATTERY CAPACITY	2 AH
BATTERY CHARGING TIME	60 MIN
NO-LOAD SPEED (GEAR I / II)	0-380 / 0-1250 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	0,8-10 MM
MAX. TORQUE (SOFT / HARD)	19 / 30 NM
DRILLING OUTPUT IN STEEL	10 MM
DRILLING OUTPUT IN WOOD	28 MM
MAX. SCREW DIAMETER	6 MM
WEIGHT	0,96 KG

CORDLESS DRILL AND SCREWDRIVER  
CT21081HQ-2 BMC

- SPINDLE AUTOMATIC LOCKING
- QUICK-CHANGE ATTACHMENTS
- STEP SPEED SELECTION
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 2 MODES (SCREWDRIVING / DRILLING)
- QUICK CHARGE

ACCESSORIES INCLUDED

Batteries 2 pcs, Charger, Quick-change keyless chuck, Quick-change tool holder, Quick-change angle tool holder, Belt clip.



BATTERY CAPACITY	2 AH
BATTERY CHARGING TIME	60 MIN
NO-LOAD SPEED (GEAR I / II)	0-380 / 0-1250 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	0,8-10 MM
MAX. TORQUE (SOFT / HARD)	19 / 30 NM
DRILLING OUTPUT IN STEEL	10 MM
DRILLING OUTPUT IN WOOD	28 MM
MAX. SCREW DIAMETER	6 MM
WEIGHT	1,13 KG



# 20 V MAX PLATFORM



## HIGH PERFORMANCE BRUSHLESS MOTOR

THE 20 V MAX RANGE INCLUDES NEW TOOLS WITH BRUSHLESS MOTOR WITH ADVANCED TECHNOLOGY THAT GUARANTEES GREATER PERFORMANCE, LONGER LIFE, LIGHTER AND MORE COMPACT TOOLS.

## BRUSHLESS

## A WIDE RANGE OF CORDLESS PRODUCTS

A CONSTANTLY GROWING RANGE OF OVER 50 MODELS, DESIGNED TO FIT THE MOST DEMANDING APPLICATIONS.

## +50 MODELS

THE 4 LEVELS OF ADAPTABILITY ALLOW TO CHOOSE THE TYPE OF BATTERY AND THE DURATION OF USE.

## 2AH, 4AH, 5AH, 8AH

OUR QUICK CHARGERS ALLOW TO BE ALWAYS OPERATIONAL AND OPTIMIZE YOUR WORK.

## 2A, 4A, 9A

## 21700 OPTIMIZED CELLS

THE NEW 21700 PROFESSIONAL LITHIUM BATTERY CELLS HAVE A LOWER IMPEDANCE WHICH GUARANTEES MORE POWER. OUR 20 V MAX BATTERIES HAVE SLOW SELF-DISCHARGE WHICH GUARANTEES LONGER LIFE. THE 20 V MAX BATTERIES HAVE A REDUCED MEMORY EFFECT WHICH GUARANTEES LONGER LIFE CYCLES.

**+35%\***  
CAPACITY

**-10%\***  
WEIGHT

**LONG**  
DURATION

**REDUCED**  
MEMORY EFFECT

\*21700 VS 18650 CELL BATTERIES COMPARATIVE.

Hot air gun  
CT60001HX



Heavy rotary  
CT28001HX  
**BRUSHLESS**



Jig saw  
CT25003HX  
**BRUSHLESS**



Circular saw  
CT25002-165HX  
**BRUSHLESS**



Sabre saw  
CT25007HX



Straight grinder  
CT23007HX  
**BRUSHLESS**



Angle grinder  
CT23001-125HX  
**BRUSHLESS**



Angle grinder  
CT23008-125HX  
**BRUSHLESS**



USB charger  
CAU02X







**SCAN THE  
QR CODE**

to watch the promo video  
on YouTube.



Drill and screwdriver  
CT21128HMX  
**BRUSHLESS**



Impact drill and  
screwdriver  
CT21127HMX  
**BRUSHLESS**



Impact drill and  
screwdriver  
CT21112HMX  
**BRUSHLESS**



Impact drill and  
screwdriver  
CT21075HMX



Impact drill and  
screwdriver  
CT21093HMX  
**BRUSHLESS**



Impact  
screwdriver  
CT22051HMX  
**BRUSHLESS**



Impact wrench  
CT22057HMX  
**BRUSHLESS**




Impact wrench  
CT22050HMX  
**BRUSHLESS**



Impact wrench  
CT22058HMX  
**BRUSHLESS**



Mixer  
CT26012HMX  
**BRUSHLESS**



High-pressure washer  
CT63002HMX



Power planer  
CT24001HMX



Rotary sander  
CT23011HMX



Brad nailer  
CT61001HMX



Orbital sander  
CT23010HMX



Sprayer  
CT29003HMX



Blower  
CT29002HMX



Edge trimmer  
CT26010HMX  
**BRUSHLESS**



Torch  
CT26018HMX



Torch  
CT26008HMX



Shears  
CT29001HMX  
**BRUSHLESS**



Vacuum cleaner  
CT63001HMX

hammer



Brush cutter  
CT29012HMX



Lawn mower  
CT29018HMX  
**BRUSHLESS**



Chainsaw  
CT29006HMX  
**BRUSHLESS**



Blower  
CT29013HMX





CORDLESS DRILL AND SCREWDRIVER  
CT21128HMX

- METAL KEYLESS CHUCK
- SPINDLE AUTOMATIC LOCKING
- ROTATIONAL DIRECTION SWITCH
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 2 MODES (SCREWDRIVING / DRILLING)

ACCESSORI INCLUSI  
Belt clip, PH2-6 (50mm) bit.



20VX  
NEW

BRUSHLESS

BATTERY COMPATIBILITY	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II)	0-500 / 0-1800 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	0,8-10 MM
MAX. TORQUE (SOFT / HARD)	27 / 50 NM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	32 MM
MAX. SCREW DIAMETER	10 MM
WEIGHT	0,91 KG

CORDLESS DRILL AND SCREWDRIVER  
CT21128HMX-2 IMC

- METAL KEYLESS CHUCK
- SPINDLE AUTOMATIC LOCKING
- ROTATIONAL DIRECTION SWITCH
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 2 MODES (SCREWDRIVING / DRILLING)

ACCESSORIES INCLUDED  
Batteries 2pcs, Charger,  
Belt clip, PH2-6 (50mm) bit.



20VX  
NEW

BRUSHLESS

BATTERY CAPACITY	2 AH
NO-LOAD SPEED (GEAR I / II)	0-500 / 0-1800 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	0,8-10 MM
MAX. TORQUE (SOFT / HARD)	27 / 50 NM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	32 MM
MAX. SCREW DIAMETER	10 MM
WEIGHT	1,28 KG

CORDLESS DRILL AND SCREWDRIVER  
CT21128HMX IMC

- METAL KEYLESS CHUCK
- SPINDLE AUTOMATIC LOCKING
- ROTATIONAL DIRECTION SWITCH
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 2 MODES (SCREWDRIVING / DRILLING)

ACCESSORIES INCLUDED  
Belt clip, PH2-6 (50mm) bit.



20VX  
NEW

BRUSHLESS

BATTERY COMPATIBILITY	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II)	0-500 / 0-1800 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	0,8-10 MM
MAX. TORQUE (SOFT / HARD)	27 / 50 NM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	32 MM
MAX. SCREW DIAMETER	10 MM
WEIGHT	0,91 KG

CORDLESS IMPACT DRILL AND SCREWDRIVER  
CT21075HMX-2 BMC

- STEP SPEED SELECTION
- SPINDLE AUTOMATIC LOCKING
- METAL KEYLESS CHUCK
- STEP SPEED SELECTION
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 3 MODES (SCREWDRIVING / DRILLING / IMPACT DRILLING)

ACCESSORIES INCLUDED  
Additional handle, Depth stop, Belt  
clip, Batteries 2 pcs, Charger.



20VX

BATTERY CAPACITY	2 AH
NO-LOAD SPEED (GEAR I / II)	0-400 / 0-1500 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-6000 / 0-22500 MIN <sup>-1</sup>
MAX. TORQUE (SOFT / HARD)	45 / 55 NM
CHUCK TIGHTENING RANGE	1,5-13 MM
DRILLING OUTPUT IN CONCRETE	16 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	40 MM
WEIGHT	1,62 KG

CORDLESS IMPACT DRILL AND SCREWDRIVER  
CT21075HMX-4 BMC

- STEP SPEED SELECTION
- SPINDLE AUTOMATIC LOCKING
- METAL KEYLESS CHUCK
- STEP SPEED SELECTION
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 3 MODES (SCREWDRIVING / DRILLING / IMPACT DRILLING)

ACCESSORIES INCLUDED  
Additional handle, Depth stop, Belt  
clip, Batteries 2 pcs, Charger.



20VX

BATTERY CAPACITY	4 AH
NO-LOAD SPEED (GEAR I / II)	0-400 / 0-1500 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-6000 / 0-22500 MIN <sup>-1</sup>
MAX. TORQUE (SOFT / HARD)	45 / 55 NM
CHUCK TIGHTENING RANGE	1,5-13 MM
DRILLING OUTPUT IN CONCRETE	16 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	40 MM
WEIGHT	1,88 KG





CORDLESS IMPACT DRILL AND SCREWDRIVER  
CT21093HMX

- BRUSHLESS MOTOR
- STEP SPEED SELECTION
- REVERSE FUNCTION
- METAL KEYLESS CHUCK
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 3 MODES (SCREWDRIVING / DRILLING / IMPACT DRILLING)

ACCESSORIES INCLUDED  
Additional handle, Depth stop, Belt clip.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II)	0-500 / 0-2000 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-7500 / 0-30000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	1,5-13 MM
MAX. TORQUE (SOFT/HARD)	50 / 75 NM
DRILLING OUTPUT IN CONCRETE	16 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	40 MM
WEIGHT	1,39 KG



CORDLESS IMPACT DRILL AND SCREWDRIVER  
CT21093HMX-4 BMC

- BRUSHLESS MOTOR
- STEP SPEED SELECTION
- REVERSE FUNCTION
- METAL KEYLESS CHUCK
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 3 MODES (SCREWDRIVING / DRILLING/ IMPACT DRILLING)

ACCESSORIES INCLUDED  
Batteries 2 pcs, Charger, Additional handle, Depth stop, Belt clip, Screwdriver bit (double head).

BRUSHLESS

BATTERY CAPACITY	4 AH
NO-LOAD SPEED (GEAR I / II)	0-500 / 0-2000 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-7500 / 0-30000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	1,5-13 MM
MAX. TORQUE (SOFT/HARD)	50 / 75 NM
DRILLING OUTPUT IN CONCRETE	16 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	40 MM
WEIGHT	2,05 KG



CORDLESS IMPACT DRILL AND SCREWDRIVER  
CT21127HMX

- BRUSHLESS MOTOR
- STEP SPEED SELECTION
- REVERSE FUNCTION
- 3 MODES (SCREWDRIVING / DRILLING / IMPACT DRILLING)
- METAL KEYLESS CHUCK
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE

ACCESSORIES INCLUDED  
Belt clip, PH2-6 (50mm) bit, Additional handle.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II)	0-500/0-2100 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-7500/0-32000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	1,5-13 MM
MAX. TORQUE (SOFT/HARD)	50 / 100 NM
DRILLING OUTPUT IN CONCRETE	12 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	38 MM
WEIGHT	1,49 KG



CORDLESS IMPACT DRILL AND SCREWDRIVER  
CT21127HMX-5 IMC

- BRUSHLESS MOTOR
- STEP SPEED SELECTION
- REVERSE FUNCTION
- 3 MODES (SCREWDRIVING / DRILLING / IMPACT DRILLING)
- METAL KEYLESS CHUCK
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE

ACCESSORIES INCLUDED  
Batteries 2pcs, Charger, Belt clip, PH2-6 (50mm) bit, Additional handle.



CORDLESS IMPACT DRILL AND SCREWDRIVER  
CT21127HMX IMC

- BRUSHLESS MOTOR
- STEP SPEED SELECTION
- REVERSE FUNCTION
- 3 MODES (SCREWDRIVING / DRILLING / IMPACT DRILLING)
- METAL KEYLESS CHUCK
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE

ACCESSORIES INCLUDED  
Belt clip, PH2-6 (50mm) bit, Additional handle.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II)	0-500/0-2100 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-7500/0-32000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	1,5-13 MM
MAX. TORQUE (SOFT/HARD)	50 / 100 NM
DRILLING OUTPUT IN CONCRETE	12 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	38 MM
WEIGHT	1,49 KG



BRUSHLESS

BATTERY CAPACITY	5 AH
NO-LOAD SPEED (GEAR I / II)	0-500/0-2100 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-7500/0-32000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	1,5-13 MM
MAX. TORQUE (SOFT/HARD)	50 / 100 NM
DRILLING OUTPUT IN CONCRETE	12 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	38 MM
WEIGHT	2,18 KG



CORDLESS IMPACT DRILL AND SCREWDRIVER

CT21112HMX

20V MAX

NEW

- BRUSHLESS MOTOR
- STEP SPEED SELECTION
- REVERSE FUNCTION
- METAL KEYLESS CHUCK
- 3 MODES (SCREWDRIVING / DRILLING / IMPACT DRILLING)
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE

ACCESSORIES INCLUDED

Belt clip, PH2-6 (50mm) bit,  
Additional handle.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II)	0-500/0-2000 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-7500/0-32000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	1,5-13 MM
MAX. TORQUE (SOFT/HARD)	60 / 120 NM
DRILLING OUTPUT IN CONCRETE	13 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	38 MM
WEIGHT	1,59 KG



CORDLESS IMPACT DRILL AND SCREWDRIVER

CT21112HMX IMC

20V MAX

NEW

- BRUSHLESS MOTOR
- STEP SPEED SELECTION
- REVERSE FUNCTION
- METAL KEYLESS CHUCK
- 3 MODES (SCREWDRIVING / DRILLING / IMPACT DRILLING)
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE

ACCESSORIES INCLUDED

Belt clip, PH2-6 (50mm) bit,  
Additional handle.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II)	0-500/0-2000 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-7500/0-32000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	1,5-13 MM
MAX. TORQUE (SOFT/HARD)	60 / 120 NM
DRILLING OUTPUT IN CONCRETE	13 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	38 MM
WEIGHT	1,59 KG



CORDLESS IMPACT DRILL AND SCREWDRIVER

CT21112HMX-5 IMC

20V MAX

NEW

- BRUSHLESS MOTOR
- STEP SPEED SELECTION
- REVERSE FUNCTION
- METAL KEYLESS CHUCK
- 3 MODES (SCREWDRIVING / DRILLING / IMPACT DRILLING)
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE

ACCESSORIES INCLUDED

Batteries 2pcs, Charger,  
Belt clip, PH2-6 (50mm) bit,  
Additional handle.



BRUSHLESS

BATTERY CAPACITY	5 AH
NO-LOAD SPEED (GEAR I / II)	0-500/0-2000 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-7500/0-32000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	1,5-13 MM
MAX. TORQUE (SOFT/HARD)	60 / 120 NM
DRILLING OUTPUT IN CONCRETE	13 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	38 MM
WEIGHT	2,28 KG

CORDLESS IMPACT SCREWDRIVER

CT22051HX IMC

20V MAX

NEW

- BRUSHLESS MOTOR
- 1/4" HEX TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED

Belt clip

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II / III)	0-1500 / 0-2000 / 0-2500 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1800 / 0-2700 / 0-3300 MIN <sup>-1</sup>
TOOL HOLDER	1/4" HEX
MAX. TORQUE	280 NM
MAX. BOLT / NUT DIAMETER	M22
WEIGHT	1,23 KG



- BRUSHLESS MOTOR
- 1/4" HEX TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED

Belt clip

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II / III)	0-1500 / 0-2000 / 0-2500 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1800 / 0-2700 / 0-3300 MIN <sup>-1</sup>
TOOL HOLDER	1/4" HEX
MAX. TORQUE	280 NM
MAX. BOLT / NUT DIAMETER	M22
WEIGHT	1,23 KG





CORDLESS IMPACT SCREWDRIVER  
CT2205 1HX-5 IMC

- BRUSHLESS MOTOR
- 1/4" HEX TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED  
Batteries 2pcs, Charger,  
Belt clip.



BRUSHLESS

BATTERY CAPACITY	5 AH
NO-LOAD SPEED (GEAR I / II / III)	0-1500 / 0-2000 / 0-2500 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1800 / 0-2700 / 0-3300 MIN <sup>-1</sup>
TOOL HOLDER	1/4" HEX
MAX. TORQUE	280 NM
MAX. BOLT / NUT DIAMETER	M22
WEIGHT	1,92 KG

CORDLESS IMPACT WRENCH  
CT22050HX-5 IMC

- BRUSHLESS MOTOR
- 1/2" SQUARE TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED  
Batteries 2pcs, Charger,  
Pin and spring, Belt clip.



BRUSHLESS

BATTERY CAPACITY	5 AH
NO-LOAD SPEED (GEAR I / II / III)	0-1500/ 0-1900 / 0-2300 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1800 / 0-2500 / 0-3100 MIN <sup>-1</sup>
TOOL HOLDER	1/2" SQUARE
MAX. TORQUE	350 NM
MAX. BOLT / NUT DIAMETER	M22
WEIGHT	1,92 KG

CORDLESS IMPACT WRENCH  
CT22050HX

- BRUSHLESS MOTOR
- 1/2" SQUARE TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED  
Pin and spring, Belt clip.



BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II / III)	0-1500/ 0-1900 / 0-2300 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1800 / 0-2500 / 0-3100 MIN <sup>-1</sup>
TOOL HOLDER	1/2" SQUARE
MAX. TORQUE	350 NM
MAX. BOLT / NUT DIAMETER	M22
WEIGHT	1,23 KG

CORDLESS IMPACT WRENCH  
CT22050HX IMC

- BRUSHLESS MOTOR
- 1/2" SQUARE TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED  
Pin and spring, Belt clip.



BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II / III)	0-1500/ 0-1900 / 0-2300 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1800 / 0-2500 / 0-3100 MIN <sup>-1</sup>
TOOL HOLDER	1/2" SQUARE
MAX. TORQUE	350 NM
MAX. BOLT / NUT DIAMETER	M22
WEIGHT	1,23 KG

CORDLESS IMPACT WRENCH  
CT22057HX

- BRUSHLESS MOTOR
- 1/2" SQUARE TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED  
Belt clip.



BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II / III)	0-1200 / 0-1500 / 0-1900 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1700 / 2100 / 2400 MIN <sup>-1</sup>
TOOL HOLDER	1/2" SQUARE
MAX. TORQUE (SCREW / UNSCREW)	400 - 550 - 600 / 900 NM
MAX. BOLT / NUT DIAMETER	M28
WEIGHT	1,8 KG



CORDLESS IMPACT WRENCH  
CT22057HX IMC

- BRUSHLESS MOTOR
- 1/2" SQUARE TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED  
Belt clip.



20VX  
NEW

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II / III)	0-1200 / 0-1500 / 0-1900 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1700 / 2100 / 2400 MIN <sup>-1</sup>
TOOL HOLDER	1/2" SQUARE
MAX. TORQUE (SCREW / UNSCREW)	400 - 550 - 600 / 900 NM
MAX. BOLT / NUT DIAMETER	M28
WEIGHT	1,8 KG

CORDLESS IMPACT WRENCH  
CT22057HX-5 IMC

- BRUSHLESS MOTOR
- 1/2" SQUARE TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED  
Batteries 2pcs, Charger,  
Belt clip.



20VX  
NEW

BRUSHLESS

BATTERY CAPACITY	5 AH
NO-LOAD SPEED (GEAR I / II / III)	0-1200 / 0-1500 / 0-1900 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1700 / 2100 / 2400 MIN <sup>-1</sup>
TOOL HOLDER	1/2" SQUARE
MAX. TORQUE (SCREW / UNSCREW)	500 - 550 - 600 / 1000 NM
MAX. BOLT / NUT DIAMETER	M28
WEIGHT	2,49 KG

CORDLESS IMPACT WRENCH  
CT22058HX

- BRUSHLESS MOTOR
- 3/4" SQUARE TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP



20VX  
NEW

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II / III)	0-900 / 0-1200 / 0-1500 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1800 / 2200 / 2800 MIN <sup>-1</sup>
TOOL HOLDER	3/4" SQUARE
MAX. TORQUE (SCREW / UNSCREW)	600 - 800 - 1000 / 1600 NM
MAX. BOLT / NUT DIAMETER	M30
WEIGHT	3 KG

CORDLESS IMPACT WRENCH  
CT22058HX IMC

- BRUSHLESS MOTOR
- 3/4" SQUARE TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP



20VX  
NEW

BRUSHLESS

BATTERY CAPACITY	5 AH
NO-LOAD SPEED (GEAR I / II / III)	0-900 / 0-1200 / 0-1500 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1800 / 2200 / 2800 MIN <sup>-1</sup>
TOOL HOLDER	3/4" SQUARE
MAX. TORQUE (SCREW / UNSCREW)	600 - 800 - 1000 / 1600 NM
MAX. BOLT / NUT DIAMETER	M30
WEIGHT	3,69 KG

CORDLESS IMPACT WRENCH  
CT22058HX IMC

- BRUSHLESS MOTOR
- 3/4" SQUARE TOOL HOLDER
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP



20VX  
NEW

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II / III)	0-900 / 0-1200 / 0-1500 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II / III)	0-1800 / 2200 / 2800 MIN <sup>-1</sup>
TOOL HOLDER	3/4" SQUARE
MAX. TORQUE (SCREW / UNSCREW)	600 - 800 - 1000 / 1600 NM
MAX. BOLT / NUT DIAMETER	M30
WEIGHT	3 KG



CORDLESS HEAVY ROTARY HAMMER  
CT28001HX BMC

- BRUSHLESS MOTOR
- SDS-PLUS CHUCK
- ROTATION SPEED STABILIZATION SYSTEM
- VARIO-LOCK MODE
- ANTI-VIBRATIONS SYSTEM
- SAFETY CLUTCH

ACCESSORIES INCLUDED  
Depth stop, Additional handle.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	0-1400 MIN <sup>-1</sup>
IMPACT RATE	0-4500 MIN <sup>-1</sup>
SINGLE IMPACT POWER	2,3 J
DRILLING OUTPUT IN CONCRETE	18 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	20 MM
WEIGHT	2,42 KG



CORDLESS HEAVY ROTARY HAMMER  
CT28001HX-4 BMC

- BRUSHLESS MOTOR
- SDS-PLUS CHUCK
- ROTATION SPEED STABILIZATION SYSTEM
- VARIO-LOCK MODE
- ANTI-VIBRATIONS SYSTEM
- SAFETY CLUTCH

ACCESSORIES INCLUDED  
Depth stop,  
Additional handle,  
Batteries 2 pcs, Charger.

BRUSHLESS

BATTERY CAPACITY	4 AH
NO-LOAD SPEED	0-1400 MIN <sup>-1</sup>
IMPACT RATE	0-4500 MIN <sup>-1</sup>
SINGLE IMPACT POWER	2,3 J
DRILLING OUTPUT IN CONCRETE	18 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	20 MM
WEIGHT	3,1 KG



CORDLESS HEAVY ROTARY HAMMER  
CT28001HX IMC

- BRUSHLESS MOTOR
- SDS-PLUS CHUCK
- ROTATION SPEED STABILIZATION SYSTEM
- VARIO-LOCK MODE
- ANTI-VIBRATIONS SYSTEM
- SAFETY CLUTCH

ACCESSORIES INCLUDED  
Depth stop,  
Additional handle.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	0-1400 MIN <sup>-1</sup>
IMPACT RATE	0-4500 MIN <sup>-1</sup>
SINGLE IMPACT POWER	2,3 J
DRILLING OUTPUT IN CONCRETE	18 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	20 MM
WEIGHT	2,42 KG



NEW



CORDLESS HEAVY ROTARY HAMMER  
CT28001HX-5 IMC

- BRUSHLESS MOTOR
- SDS-PLUS CHUCK
- ROTATION SPEED STABILIZATION SYSTEM
- VARIO-LOCK MODE
- ANTI-VIBRATIONS SYSTEM
- SAFETY CLUTCH

ACCESSORIES INCLUDED  
Depth stop, Additional handle,  
Batteries 2 pcs, Charger.

BRUSHLESS

BATTERY CAPACITY	5 AH
NO-LOAD SPEED	0-1400 MIN <sup>-1</sup>
IMPACT RATE	0-4500 MIN <sup>-1</sup>
SINGLE IMPACT POWER	2,3 J



NEW

DRILLING OUTPUT IN CONCRETE	18 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	20 MM
WEIGHT	3,11 KG



CORDLESS ANGLE GRINDER  
CT23001-125HX BMC

- BRUSHLESS MOTOR
- SOFT START
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH
- SAFETY CLUTCH
- QUICK ADJUSTABLE PROTECTIVE CASING

ACCESSORIES INCLUDED  
Additional handle, Flange wrench,  
Protective casing.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
RATED SPEED	8000 MIN <sup>-1</sup>
MAX. Ø OF CUTTING DISC	125 MM
MAX. Ø OF GRINDING DISC	125 MM
MAX. Ø OF RUBBER SANDING PLATE	125 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
SPINDLE THREAD	M14
WEIGHT	1,83 KG



CORDLESS ANGLE GRINDER  
CT23001-125HX IMC

- BRUSHLESS MOTOR
- SOFT START
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH
- SAFETY CLUTCH
- QUICK ADJUSTABLE PROTECTIVE CASING

ACCESSORIES INCLUDED  
Additional handle, Flange wrench,  
Protective casing.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
RATED SPEED	8000 MIN <sup>-1</sup>
MAX. Ø OF CUTTING DISC	125 MM
MAX. Ø OF GRINDING DISC	125 MM
MAX. Ø OF RUBBER SANDING PLATE	125 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
SPINDLE THREAD	M14
WEIGHT	1,83 KG



NEW



CORDLESS ANGLE GRINDER  
CT23001-125HX-5 IMC

- BRUSHLESS MOTOR
- SOFT START
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH
- SAFETY CLUTCH
- QUICK ADJUSTABLE PROTECTIVE CASING

ACCESSORIES INCLUDED  
Additional handle, Flange wrench,  
Protective casing.

BRUSHLESS

BATTERY CAPACITY	5 AH
RATED SPEED	8000 MIN <sup>-1</sup>
MAX. Ø OF CUTTING DISC	125 MM
MAX. Ø OF GRINDING DISC	125 MM
MAX. Ø OF RUBBER SANDING PLATE	125 MM



NEW



MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
SPINDLE THREAD	M14
WEIGHT	2,52 KG

CORDLESS ANGLE GRINDER  
CT23008-125HX

- BRUSHLESS MOTOR
- SOFT START
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH
- SAFETY CLUTCH

ACCESSORIES INCLUDED  
Additional handle, Flange wrench,  
Protective casing.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
RATED SPEED	8500 MIN <sup>-1</sup>
MAX. Ø OF CUTTING DISC	125 MM
MAX. Ø OF GRINDING DISC	125 MM
MAX. Ø OF RUBBER SANDING PLATE	125 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
MAX. BORE Ø	22,23 MM
SPINDLE THREAD	M14
WEIGHT	1,9 KG



CORDLESS ANGLE GRINDER  
CT23008-125HX IMC

- BRUSHLESS MOTOR
- VARIABLE SPEED
- SOFT START
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH
- SAFETY CLUTCH

ACCESSORIES INCLUDED  
Additional handle, Flange wrench,  
Protective casing.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
RATED SPEED	3000-8500 MIN <sup>-1</sup>
MAX. Ø OF CUTTING DISC	125 MM
MAX. Ø OF GRINDING DISC	125 MM
MAX. Ø OF RUBBER SANDING PLATE	125 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
MAX. BORE Ø	22,23 MM
SPINDLE THREAD	M14
WEIGHT	1,9 KG



NEW





CORDLESS STRAIGHT GRINDER  
CT23007HX

- BRUSHLESS MOTOR
- VARIABLE SPEED
- ROTATION SPEED STABILIZATION SYSTEM
- SOFT START
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH
- OVERHEATING AND OVERLOAD PROTECTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Wrenches 2 pcs



BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	7000-26000 MIN <sup>-1</sup>
NUMBER OF RPM STAGES	6
COLLET DIAMETER	6 MM
WEIGHT	1,35 KG

CORDLESS JIGSAW  
CT25003HX BMC

- BRUSHLESS MOTOR
- SAW BLADE EASY CHANGE
- 4-STAGE PENDULUM
- STROKE RATE REGULATION
- BREAK RUNDOWN
- METAL BASE PLATE

ACCESSORIES INCLUDED  
Allen key, Plastic overlay.



BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
STROKE RATE AT NO-LOAD	700-3000 MIN <sup>-1</sup>
LENGTH OF STROKE OF THE SAW BLADE	26 MM
MAX. ANGULARITY OF THE BODY (LEFT / RIGHT)	45° / 45°
MAX. CUTTING ABILITY IN WOOD	85 MM
MAX. CUTTING ABILITY IN ALUMINUM	20 MM
MAX. CUTTING ABILITY IN STEEL	10 MM
WEIGHT	2,12 KG

CORDLESS SABRE SAW  
CT25007HX

- ELECTRONIC SPEED ADJUSTMENT
- SAW BLADE EASY CHANGE
- ROTATING REAR HANDLE
- REAR D-HANDLE
- SOFT GRIP

ACCESSORIES INCLUDED  
Saw blade.



COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
STROKE RATE AT NO-LOAD	0-2800 MIN <sup>-1</sup>
STROKE LENGTH	26 MM
CUTTING ABILITY IN WOOD	115 MM
CUTTING ABILITY IN STEEL (PROFILE / PIPE)	5 / 60 MM
WEIGHT	1,92 KG

CORDLESS JIGSAW  
CT25003HX

- BRUSHLESS MOTOR
- SAW BLADE EASY CHANGE
- 4-STAGE PENDULUM
- STROKE RATE REGULATION
- BREAK RUNDOWN
- METAL BASE PLATE

ACCESSORIES INCLUDED  
Allen key, Plastic overlay.



BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
STROKE RATE AT NO-LOAD	700-3000 MIN <sup>-1</sup>
LENGTH OF STROKE OF THE SAW BLADE	26 MM
MAX. ANGULARITY OF THE BODY (LEFT / RIGHT)	45° / 45°
MAX. CUTTING ABILITY IN WOOD	125 MM
MAX. CUTTING ABILITY IN ALUMINUM	20 MM
MAX. CUTTING ABILITY IN STEEL	10 MM
WEIGHT	2,12 KG



CORDLESS CIRCULAR SAW  
CT25002-165HX

- BRUSHLESS MOTOR
- SOFT START
- BREAK RUNDOWN
- ALUMINIUM BASE PLATE
- OVERHEATING AND OVERLOAD PROTECTION SYSTEM
- HIGH-TORQUE INDICATOR

ACCESSORIES INCLUDED  
Allen key, Parallel guide,  
Vacuuming connector piece.



BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	4800 MIN <sup>-1</sup>
CIRCULAR SAW BLADE Ø	165 MM
BORE Ø OF CIRCULAR SAW BLADE	20 MM
MAX. THICKNESS OF CIRCULAR SAW BLADE	1,6 MM
MAX. CUTTING DEPTH BY 90°	57 MM
MAX. CUTTING DEPTH BY 45°	41 MM
MAX. CUTTING DEPTH BY 50°	37 MM
WEIGHT	2,92 KG



CORDLESS CIRCULAR SAW  
CT25002-165HX BMC

- BRUSHLESS MOTOR
- SOFT START
- BREAK RUNDOWN
- ALUMINIUM BASE PLATE
- OVERHEATING AND OVERLOAD PROTECTION SYSTEM
- HIGH-TORQUE INDICATOR

ACCESSORIES INCLUDED  
Allen key, Parallel guide,  
Vacuuming connector piece.

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	4800 MIN <sup>-1</sup>
CIRCULAR SAW BLADE Ø	165 MM
BORE Ø OF CIRCULAR SAW BLADE	20 MM
MAX. THICKNESS OF CIRCULAR SAW BLADE	1,6 MM
MAX. CUTTING DEPTH BY 90°	57 MM
MAX. CUTTING DEPTH BY 45°	41 MM
MAX. CUTTING DEPTH BY 50°	37 MM
WEIGHT	2,92 KG



20VX

CORDLESS ORBITAL SANDER  
CT23010HX

- VELCRO FIXING SYSTEM
- VARIABLE SPEED
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Sanding paper, Dust bag.

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	7000-11000 MIN <sup>-1</sup>
NO-LOAD OSCILLATIONS RATE	14000-22000 MIN <sup>-1</sup>
ORBITAL Ø	1,6 MM
SANDING PLATE SIZE	100 X 145 MM
WEIGHT	0,96 KG



20VX

NEW

CORDLESS ROTARY SANDER  
CT23011HX

- VELCRO FIXING SYSTEM
- VARIABLE SPEED
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Sanding paper, Dust bag,  
Tube for dust removal.

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	7000-11000 MIN <sup>-1</sup>
NO-LOAD OSCILLATIONS RATE	14000-22000 MIN <sup>-1</sup>
ECCENTRICITY	1,25 MM
SANDING PLATE Ø	120 MM
WEIGHT	1,04 KG



20VX

NEW

CORDLESS POWER PLANER  
CT24001HX

- SOFT START FUNCTION
- PLANING DEPTH REGULATOR
- V-GROOVE
- REBATING
- SAFETY STOP
- LOCK-OFF FUNCTION
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Dust bag, Allen key, Wrench,  
Accessories storage container  
Vertical stop, Bracket,  
Side stop.

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	16000 MIN <sup>-1</sup>
PLANING WIDTH	82 MM
PLANING DEPTH	0-1,5 MM
GROOVING DEPTH	0-9 MM
WEIGHT	2,3 KG



20VX

CORDLESS BRAD NAILER  
CT61001HX

- 2 IN 1 U-NAIL / T-NAIL
- ADJUSTABLE IMPACT KNOB
- BELT CLIP
- SOFT GRIP

ACCESSORIES INCLUDED  
Staples 500 pcs,  
Nails 500 pcs, Plastic tip,  
Hexagonal key.

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
LOAD CAPACITY	100 PCS
STAPLES APPLIED	TYPE 600, 18 GAUGE
STAPLE WIDTH / LENGTH	5,7 / 15-22 MM
NAILS APPLIED	TYPE F, 18GAUGE
NAIL WIDTH / LENGTH	2 / 15, 20, 25, 30, 32 MM
WEIGHT	2,43 KG



20VX

CORDLESS ROUTER  
CT26010HX

- BRUSHLESS MOTOR
- VARIABLE SPEED
- SPINDLE LOCK
- DEPTH ADJUSTMENT
- DUST EXTRACTION

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	10000-30000 MIN <sup>-1</sup>
COLLET INNER Ø	6 / 8MM (1/4" / 3/8")
STROKE OF THE ROUTER BASE	20 MM
WEIGHT	1,34 KG



20VX



CORDLESS MIXER  
CT26012HX

- BRUSHLESS MOTOR
- M14 TOOL HOLDER
- 2 SPEED SELECTION
- ELECTRONIC SPEED ADJUSTMENT
- OVERHEAT + OVERLOAD PROTECTION
- QUICK CHARGE
- SOFT GRIP

ACCESSORIES INCLUDED  
Wrenches 2 pcs, Mixing paddle, Extension rod.



BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED (GEAR I / II)	0-420 / 0-710 MIN <sup>-1</sup>
MAX. STIRRER PADDLE DIAMETER	120 MM
WEIGHT	3,7 KG

CORDLESS BLOWER  
CT29002HX

- VARIABLE SPEED
- 2 MODES (BLOWER / VACUUM CLEANER)
- STATIONARY USE
- LOCK-ON FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Nozzle, Dust bag.



COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
MAX. SUCTION	4,5 KPA
MAX.FLOW RATE	63,5 M/S
WEIGHT	0,98 KG

CORDLESS PRESSURE WASHER  
CT63002HX

- SELF PRIMING
- ADJUSTABLE STREAM
- LOW PRESSURE ECO MODE
- LOCK-OFF FUNCTION
- TEMPERATURE PROTECTION
- QUICK CHARGER
- SOFT GRIP

ACCESSORIES INCLUDED  
Sprayer holder, Tube Quick-release adapter (with valve),  
Hose, Detergent spray nozzle.



COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
MAX. FEED PRESSURE	0,5 MPA
MIN FLOW RATE	<170 L/H
RATED PRESSURE	1,9 / 2,4 MPA
FLOW RATE	160 / 170 L/H
WEIGHT	1,65 KG



CORDLESS HOT AIR GUN  
CT60001HX

- FOLDABLE HOOK
- BURN-FREE DETACH MECHANISM
- INTEGRATED LED LIGHT
- LOCK-OFF FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Flat nozzle, Reflector nozzle,  
Point nozzle.



COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
MAX. TEMPERATURE	550 C°
MAX. FLOW RATE	220 L/M
WEIGHT	0,8 KG



CORDLESS VACUUM CLEANER  
CT63001HX

- DRY SUCTION
- 500 ML CAPACITY
- SOFT GRIP

ACCESSORIES INCLUDED  
Rectangular nozzle, Nozzle brush,  
Crevice nozzle, Extension tube,  
Universal holder



COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
MAX. SUCTION	3,8 KPA
DUST COLLECTOR CAPABILITY	500 ML
WEIGHT	0,86 KG





CORDLESS WORK LIGHT  
CT26008HX

- SWIVEL HEAD
- SOFT GRIP
- BELT CLIP

ACCESSORIES INCLUDED  
Belt clip.



20VX

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
LED POWER	3 W
LUMINOUS FLUX	180-250 LM
MAX. TILT ANGLE OF SWIVEL HEAD	270°
LIGHTING DURATION, APPROX. (DEPENDING ON BATTERY CAPACITY):	
- BATTERY 2AH / 4AH	~12 H / ~24 H
WEIGHT	0,42 KG



CORDLESS WORK LIGHT  
CT26018HX

- SWIVEL HEAD
- 3-MODE SETTING LIGHT

LED POWER	20 W
LUMINOUS FLUX	1000 / 2000 LM
MAX. TILT ANGLE OF SWIVEL HEAD	360°
COLOUR TEMPERATURE	5700±200 K
LIGHTING DURATION, APPROX. (DEPENDING ON BATTERY CAPACITY):	
- BY 1000 LM (BATTERY 2AH / 4AH)	~170 / 340 MIN
- BY 2000 LM (BATTERY 2AH / 4AH)	~85 / 170 MIN
WEIGHT	1,03 KG



20VX  
NEW

CORDLESS SHEARS  
CT29001HX

- BRUSHLESS MOTOR
- 3-STEP ADJUSTMENT
- SAFETY LOCK
- OVERLOAD PROTECTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Allen key, Socket wrench, Abrasive bar,  
Protective collar.



20VX

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
SHEAR CAPACITY	0-30 MM
MAX SHEAR FORCE	2600 N
WEIGHT	0,82 KG

CORDLESS SHEARS  
CT29001HX-2 TB

- BRUSHLESS MOTOR
- 3-STEP ADJUSTMENT
- SAFETY LOCK
- OVERLOAD PROTECTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Batteries 2pcs, Allen key,  
Socket wrench, Abrasive bar,  
Protective collar, Charger



20VX

BRUSHLESS

BATTERY CAPACITY	2 AH
SHEAR CAPACITY	0-30 MM
MAX SHEAR FORCE	2600 N
WEIGHT	1,58 KG



CORDLESS CHAINSAW  
CT29006HX

- BRUSHLESS MOTOR
- AUTOMATIC CHAIN LUBRICATION
- OREGON BAR AND CHAIN
- SOFT GRIP

ACCESSORIES INCLUDED  
Protective guard of the cutting unit,  
Multi-purpose wrench



BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
RATED SPEED	4200 MIN <sup>-1</sup>
SAW CHAIN SPEED	7,9 M/S
OIL TANK CAPACITY (FOR LUBRICATE THE SAW CHAIN)	115 ML
GUIDE BAR LENGTH	254 MM
SAW CHAIN PARAMETERS(CHAIN PITCH/CHAIN GAUGE)	3/8" / 1/4"
NET WEIGHT (EXCLUDED CUTTING EQUIPMENT)	2,8 KG



CORDLESS HEDGE TRIMMER  
CT29015HX

- ANTI-VIBRATIONS HANDLE
- LOCK-OFF FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Blade protective cover.



COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
IDLING SPEED	3000±200 MIN <sup>-1</sup>
STROKE RATE AT NO-LOAD	1200 MIN <sup>-1</sup>
BLADE LENGHT (FULL)	560 MM
BLADE LENGHT (WORKING)	510 MM
MAX. Ø OF CUT-OFF BRANCHES	14 MM
WEIGHT	1,98 KG

CORDLESS BLOWER  
CT29013HX

- ELECTRONIC SPEED



COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	0- 15000 MIN <sup>-1</sup>
AIR FLOW RATE	460 M <sup>3</sup> /H
AIR SPEED	140 KM/H
WEIGHT	1,37 KG



CORDLESS BRUSH CUTTER  
CT29012HX

- ROTATABLE HEAD
- GUIDE WHEEL
- ADJUSTABLE BAR
- SOFT GRIP



COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
NO-LOAD SPEED	7500 MIN <sup>-1</sup>
MOWING AREA WIDTH (CUTTING LINE)	254 / 305 MM
CUTTING LINE DIAMETER	1,6 MM
WEIGHT	1,9 KG

SPARE REEL  
CAG-HTX3  
3 pcs



COMPATIBILITY	CT29012HX
WIRE DIAMETER	1,6 MM
WIRE LENGTH	4 M

CORDLESS LAWN MOVER  
CT29018HX

- BRUSHLESS MOTOR
- FIVE CUTTING HEIGHTS
- SAFETY CUT-OUT
- SOFT GRIP



\*batteries and charger not included



Storage compartment  
for 2 20 V Max. batteries  
(2, 4, 5, 8 Ah)

BRUSHLESS

COMPATIBLES BATTERIES	2 AH, 4 AH, 5 AH, 8 AH
RATED SPEED	2800 / 3400 MIN <sup>-1</sup>
CUTTING WIDTH	380 MM
CUTTING HEIGHTS	25 / 39 / 53 / 67 / 80 MM
CAPACITY OF THE GRASS BAG	40 L
WEIGHT	14,67 KG





CHARGING TIME					
		CAC202001X 20 V Max - 2 A	CAC204001X 20 V Max - 4 A	CAC204003X 20 V Max - 4 A	CAC209001X 20 V Max - 9 A
	CAB202013XE 20 V Max - 2 Ah	60 MIN	35 MIN	1 BAT: 35 MIN 2 BAT: 75 MIN	35 MIN
	CAB204014XE 20 V Max - 4 Ah	120 MIN	60 MIN	1 BAT: 60 MIN 2 BAT: 135 MIN	45 MIN
	CAB204015XE 20 V Max - 4 Ah	120 MIN	60 MIN	1 BAT: 60 MIN 2 BAT: 135 MIN	45 MIN
	CAB205014XE 20 V Max - 5 Ah	150 MIN	75 MIN	1 BAT: 75 MIN 2 BAT: 160 MIN	55 MIN
	CAB208016XE CB 20 V Max - 8 Ah	240 MIN	120 MIN	1 BAT: 120 MIN 2 BAT: 250 MIN	50 MIN

### BATTERY PACK CAB202013XE

- COMPATIBLES CHARGERS:
- CAC202001X
  - CAC204001X
  - CAC204003X
  - CAC209001X



BATTERY CAPACITY	2 AH
BATTERY CHARGING TIME (CAC209001X)	35 MIN
BATTERY CHARGING TIME (CAC204003X)	1 BAT: 35 / 2 BAT: 75 MIN
BATTERY CHARGING TIME (CAC204001X)	35 MIN
BATTERY CHARGING TIME (CAC202001X)	60 MIN
WEIGHT	0,37 KG

### BATTERY PACK CAB204015XE

- COMPATIBLES CHARGERS:
- CAC202001X
  - CAC204001X
  - CAC204003X
  - CAC209001X



BATTERY CAPACITY	4 AH
BATTERY CHARGING TIME (CAC209001X)	45 MIN
BATTERY CHARGING TIME (CAC204003X)	1 BAT: 60 / 2 BAT: 135 MIN
BATTERY CHARGING TIME (CAC204001X)	60 MIN
BATTERY CHARGING TIME (CAC202001X)	120 MIN
WEIGHT	0,56 KG

### BATTERY PACK CAB204014XE

- COMPATIBLES CHARGERS:
- CAC202001X
  - CAC204001X
  - CAC204003X
  - CAC209001X



BATTERY CAPACITY	4 AH
BATTERY CHARGING TIME (CAC209001X)	45 MIN
BATTERY CHARGING TIME (CAC204003X)	1 BAT: 60 / 2 BAT: 135 MIN
BATTERY CHARGING TIME (CAC204001X)	60 MIN
BATTERY CHARGING TIME (CAC202001X)	120 MIN
WEIGHT	0,68 KG

### BATTERY PACK CAB205014XE

- COMPATIBLES CHARGERS:
- CAC202001X
  - CAC204001X
  - CAC204003X
  - CAC209001X



BATTERY CAPACITY	5 AH
BATTERY CHARGING TIME (CAC209001X)	55 MIN
BATTERY CHARGING TIME (CAC204003X)	1 BAT: 75 / 2 BAT: 160 MIN
BATTERY CHARGING TIME (CAC204001X)	75 MIN
BATTERY CHARGING TIME (CAC202001X)	150 MIN
WEIGHT	0,69 KG



BATTERIA  
CAB208016XE CB

CARICABATTERIE COMPATIBILI:

- CAC202001X
- CAC204001X
- CAC204003X
- CAC209001X

8  
Ah



BATTERY CAPACITY	8 AH
BATTERY CHARGING TIME (CAC209001X)	50 MIN
BATTERY CHARGING TIME (CAC204003X)	1 BAT: 120 / 2 BAT: 250 MIN
BATTERY CHARGING TIME (CAC204001X)	120 MIN
BATTERY CHARGING TIME (CAC202001X)	240 MIN
WEIGHT	1 KG

BATTERY CHARGER  
CAC204001X

COMPATIBLES BATTERIES:

- CAB202013XE
- CAB204014XE
- CAB204015XE
- CAB205014XE
- CAB208016XE



RATED POWER	100 W
OUTPUT VOLTAGE	18 - 20 V MAX.
AMPERAGE AT VOLTAGE 220-230 V	4 A
COMPARISON OF CHARGING TIMES	SEE TABLE PAGE 22
WEIGHT	0,5 KG
CAB202013XE (2 AH) CHARGING TIME	35 MIN
CAB204014XE (4 AH) CHARGING TIME	60 MIN
CAB204015XE (4 AH) CHARGING TIME	60 MIN
CAB205014XE (5 AH) CHARGING TIME	75 MIN
CAB208016XE (8 AH) CHARGING TIME	120 MIN

BATTERY CHARGER  
CAC209001X

COMPATIBLES BATTERIES:

- CAB202013XE
- CAB204014XE
- CAB204015XE
- CAB205014XE
- CAB208016XE



RATED POWER	250 W
OUTPUT VOLTAGE	18 - 20 V MAX.
AMPERAGE AT VOLTAGE 220-230 V	9 A
COMPARISON OF CHARGING TIMES	SEE TABLE PAGE 22
WEIGHT	0,93 KG
CAB202013XE (2 AH) CHARGING TIME	35 MIN
CAB204014XE (4 AH) CHARGING TIME	45 MIN
CAB204015XE (4 AH) CHARGING TIME	45 MIN
CAB205014XE (5 AH) CHARGING TIME	55 MIN
CAB208016XE (8 AH) CHARGING TIME	50 MIN

PROFESSIONAL  
20VX

BATTERY CHARGER  
CAC202001X

COMPATIBLES BATTERIES:

- CAB202013XE
- CAB204014XE
- CAB204015XE
- CAB205014XE
- CAB208016XE



RATED POWER	55 W
OUTPUT VOLTAGE	18 - 20 V MAX.
AMPERAGE AT VOLTAGE 220-230 V	2 A
COMPARISON OF CHARGING TIMES	SEE TABLE PAGE 22
WEIGHT	0,39 KG
CAB202013XE (2 AH) CHARGING TIME	60 MIN
CAB204014XE (4 AH) CHARGING TIME	120 MIN
CAB204015XE (4 AH) CHARGING TIME	120 MIN
CAB205014XE (5 AH) CHARGING TIME	150 MIN
CAB208016XE (8 AH) CHARGING TIME	240 MIN

CARICABATTERIE  
CAC204003X

BATTERIE COMPATIBILI:

- CAB202013XE
- CAB204014XE
- CAB204015XE
- CAB205014XE
- CAB208016XE



RATED POWER	105 W
OUTPUT VOLTAGE	18 - 20 V MAX.
AMPERAGE AT VOLTAGE 220-230 V	4 A
COMPARISON OF CHARGING TIMES	SEE TABLE PAGE 22
WEIGHT	0,67 KG
CAB202013XE (2 AH) CHARGING TIME	1 BAT: 35 MIN   2 BAT: 75 MIN
CAB204014XE (4 AH) CHARGING TIME	1 BAT: 60 MIN   2 BAT: 135 MIN
CAB204015XE (4 AH) CHARGING TIME	11 BAT: 60 MIN   2 BAT: 135 MIN
CAB205014XE (5 AH) CHARGING TIME	1 BAT: 75 MIN   2 BAT: 160 MIN
CAB208016XE (8 AH) CHARGING TIME	1 BAT: 120 MIN   2 BAT: 250 MIN

USB CHARGER  
CAU02X

COMPATIBLES BATTERIES:

- CAB202013XE
- CAB204014XE
- CAB204015XE
- CAB205014XE
- CAB208016XE



OUTPUT VOLTAGE USB1 (TYPE A)	5 V (1 A)
OUTPUT VOLTAGE USB2 (TYPE A)	5 V (1 A)
BATTERY TYPE	LITHIUM-ION
WEIGHT	0,85 KG

PROFESSIONAL  
20VX

PROFESSIONAL  
20VX

PROFESSIONAL  
20VX



# STACKABLE CASES SYSTEM

TO TRANSPORT  
AND ORGANIZE  
YOUR TOOLS

STACKABLE POLYPROPYLENE CASES SYSTEM.  
3 DIFFERENT SIZES. CONVENIENT CASE TROLLEY  
WITH WHEELS. A WHEELED BASE WITH 100 KG  
MAXIMUM LOAD COMPLETES THE ASSORTMENT.



## CART WITH STACKABLE CASE CTQ-VRT

28 litri  
NOVITÀ

- STACKABLE
- PP MATERIAL
- TELESCOPIC ALUMINUM HANDLE
- 2 RUBBER-COATED WHEELS
- IP54 PROTECTION
- POLYAMIDE SIDE CONNECTORS



ADJUSTABLE HANDLE



CLOSING CLASPS



SAFETY LOCKS



LENGTH INT. / EXT.	30,8 / 45 CM
WIDTH INT. / EXT.	21 / 39 CM
HEIGHT INT. / EXT.	29,6 / 69 CM
WEIGHT	4,9 KG



STACKABLE CASE  
CTQ-VM

- STACKABLE
- PP MATERIAL
- ERGONOMIC FRONT AND LID HANDLE
- IP54 PROTECTION
- POLYAMIDE SIDE CONNECTORS



LENGTH INT. / EXT.	36 / 45 CM
WIDTH INT. / EXT.	24,5 / 33 CM
HEIGHT INT. / EXT.	12 / 17 CM
WEIGHT	2,25 KG

12 lt  
NEW

STACKABLE CASE  
CTQ-VL

- STACKABLE
- PP MATERIAL
- ERGONOMIC FRONT AND LID HANDLE
- IP54 PROTECTION
- POLYAMIDE SIDE CONNECTORS



LENGTH INT. / EXT.	36 / 45 CM
WIDTH INT. / EXT.	24,5 / 33 CM
HEIGHT INT. / EXT.	19 / 24 CM
WEIGHT	2,65 KG

19 lt  
NEW



ROLL PLATE FOR STACKABLE CASE  
CTQ-PR

- PP MATERIAL
- 360° TURNABLE WHEELS
- 2 LOCKABLE WHEELS
- IP54 PROTECTION
- ALUMINUM BRACKETS




MAX. LOAD	100 KG
LENGTH	50,6 CM
WIDTH	32,5 CM
HEIGHT	14 CM
WEIGHT	2,85 KG

up to 100 kg  
NEW

TOOLS BAG  
CP-TBT-B-18

- 1680D POLYESTER FABRIC
- BELT CLIP

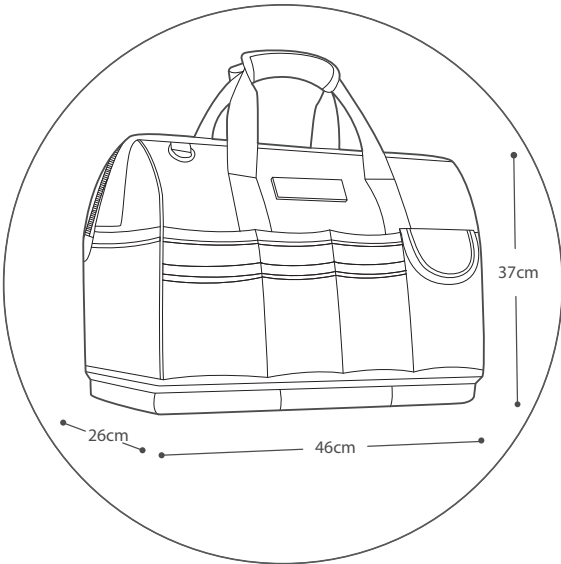



IMPACT WRENCH  
CT12018

- 1/2" SQUARE TOOL HOLDER
- REVERSE FUNCTION
- SOFT GRIP



900 W

AMPERAGE AT VOLTAGE 220-230 V	4.3 A
NO-LOAD SPEED	2100 MIN <sup>-1</sup>
IMPACT RATE	2700 MIN <sup>-1</sup>
MAX. TORQUE	320 NM
TOOL HOLDER	1/2" SQUARE
MIN. / MAX. BOLT AND NUT DIAMETER	M8-M24
WEIGHT	3,5 KG

DRILL  
CT10113

- SPINDLE AUTOMATIC LOCKING
- KEYLESS CHUCK
- STEP SPEED SELECTION
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 2 FUNCTION MODES (SCREWDRIVING / DRILLING)
- REVERSE FUNCTION
- INTEGRATED LED LIGHT



280 W

AMPERAGE AT VOLTAGE 220-230 V	1.2 A
NO-LOAD SPEED (GEAR I / II)	0-350 / 0-1400 MIN <sup>-1</sup>
TURNDOWN OF ROTATION TORQUE	0,8-22 NM
CHUCK TIGHTENING RANGE	0,8-10 MM
DRILLING OUTPUT IN STEEL	10 / 10 MM
DRILLING OUTPUT IN WOOD	16 / 20 MM
WEIGHT	1,36 KG

DRILL  
CT10151

- KEYLESS CHUCK
- STEP SPEED SELECTION
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 2 FUNCTION MODES (SCREWDRIVING / DRILLING)
- REVERSE FUNCTION
- LOCK-ON FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP



230 W

AMPERAGE AT VOLTAGE 220-230 V	1 A
NO-LOAD SPEED (GEAR I / II)	0-450 / 0-1600 MIN <sup>-1</sup>
TURNDOWN OF ROTATION TORQUE	0,7-30 NM
CHUCK TIGHTENING RANGE	0,8-10 MM
DRILLING OUTPUT IN STEEL	8 / 8 MM
DRILLING OUTPUT IN WOOD	25 / 25 MM
WEIGHT	1 KG

DRILL  
CT10126C

- KEYLESS CHUCK
- VARIABLE SPEED
- ELECTRONIC SPEED ADJUSTMENT
- REVERSE FUNCTION
- LOCK-ON FUNCTION
- BELT CLIP



400 W

AMPERAGE AT VOLTAGE 220-230 V	1.85 A
NO-LOAD SPEED	0-3000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	0,8-10 MM
DRILLING OUTPUT IN STEEL	10 MM
DRILLING OUTPUT IN WOOD	20 MM
WEIGHT	1,4 KG

DRILL  
CT10143-13C

- KEYLESS CHUCK WITH LOCKING FUNCTION
- VARIABLE SPEED
- ELECTRONIC SPEED ADJUSTMENT
- REVERSE FUNCTION
- LOCK-ON FUNCTION
- BELT CLIP
- SOFT GRIP



550 W

AMPERAGE AT VOLTAGE 220-230 V	2.65 A
NO-LOAD SPEED	0-2800 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	2-13 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	25 MM
WEIGHT	1,42 KG



DRILL AND IMPACT DRILL  
CT10152F

- KEYLESS CHUCK
- STEP SPEED SELECTION
- ELECTRONIC SPEED ADJUSTMENT
- VARIABLE TORQUE
- 3 FUNCTION MODES (SCREWDRIVING / DRILLING / CHISELING)
- REVERSE FUNCTION
- INTEGRATED LED LIGHT
- SOFT GRIP

ACCESSORIES INCLUDED  
Additional handle



AMPERAGE AT VOLTAGE 220-230 V	1.8 A
NO-LOAD SPEED (GEAR I / II)	0-480 / 0-1800 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-7200 / 0-27000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	2-13 MM
DRILLING OUTPUT IN STEEL	13 / 13 MM
DRILLING OUTPUT IN WOOD	35 / 35 MM
WEIGHT	1,66 KG

420 W  
IMPACT DRILL  
CT10128C

- KEYLESS CHUCK WITH LOCKING FUNCTION
- VARIABLE SPEED
- ELECTRONIC SPEED ADJUSTMENT
- 2 FUNCTION MODES (DRILLING / IMPACT DRILLING)
- REVERSE FUNCTION
- LOCK-ON FUNCTION
- SOFT GRIP



AMPERAGE AT VOLTAGE 220-230 V	2.8 A
NO-LOAD SPEED	0-2800 MIN <sup>-1</sup>
IMPACT RATE	0-44800 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	2-13 MM
DRILLING OUTPUT IN CONCRETE	13 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	20 MM
WEIGHT	1,7 KG

IMPACT DRILL WITH SET OF TOOLS AND ACCESSORIES  
CK10-XA98C

- KEYLESS CHUCK
- VARIABLE SPEED
- ELECTRONIC SPEED ADJUSTMENT
- 2 FUNCTION MODES (DRILLING / IMPACT DRILLING)

- REVERSE FUNCTION
- LOCK-ON FUNCTION
- SOFT GRIP



Magnetic bit holders  
60 mm

Sockets adapter  
25 mm

10 pz bits (25 mm)

- ⊖ 2 pcs: SL4 | SL6
- ⊕ 2 pcs: PH1 | PH2
- ⊗ 2 pcs: PZ1 | PZ2
- ⊙ 2 pcs: H4 | H5
- ⊛ 2 pcs: T20 | T25

Screws and plugs

- 30 pcs screws:  
ST3.5 (x10), ST4 (x10),  
ST5 (x10)
- 30 pcs plugs:  
6 (x10), 8 (x10),  
10 (x10)

Additional handle

Universal plier  
150 mm

Adjustable wrench  
150 mm

6 pcs sockets 1/4"  
⊙ 5 | 6 | 8 | 9 | 10 | 11 mm

Depth stop

Level  
230 mm

Screwdriver  
SL5x100 mm

Screwdriver  
PH1x100 mm

12 pz drill bits

- Metal:  
2 | 3 | 4 | 5 | 6 mm
- Masonry:  
6 | 8 | 10 mm
- Wood:  
4 | 5 | 6 | 8 mm

Impact drill  
CT10128C

Carpenter hammer  
250 g

Measuring tape  
3 m x 16 mm

AMPERAGE AT VOLTAGE 220-230 V	2.8 A
NO-LOAD SPEED	0-2800 MIN <sup>-1</sup>
IMPACT RATE	0-44800 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	2-13 MM

DRILLING OUTPUT IN CONCRETE	13 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	20 MM
WEIGHT	1,7 KG



IMPACT DRILL  
CT10129C

- KEYLESS CHUCK WITH LOCKING FUNCTION
- VARIABLE SPEED
- ELECTRONIC SPEED ADJUSTMENT
- 2 FUNCTION MODES (DRILLING / IMPACT DRILLING)
- REVERSE FUNCTION
- LOCK-ON FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Depth stop, Additional handle.



750 W

AMPERAGE AT VOLTAGE 220-230 V	3.5 A
NO-LOAD SPEED	0-2800 MIN <sup>-1</sup>
IMPACT RATE	0-44800 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	2-13 MM
DRILLING OUTPUT IN CONCRETE	16 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	30 MM
WEIGHT	1,9 KG

IMPACT DRILL  
CT10130C

- METAL KEYLESS CHUCK
- VARIABLE SPEED
- ELECTRONIC SPEED ADJUSTMENT
- 2 FUNCTION MODES (DRILLING / IMPACT DRILLING)
- REVERSE FUNCTION
- LOCK-ON FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Depth stop, Additional handle.



810 W

AMPERAGE AT VOLTAGE 220-230 V	3.9 A
NO-LOAD SPEED	0-2800 MIN <sup>-1</sup>
IMPACT RATE	0-44800 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	2-13 MM
DRILLING OUTPUT IN CONCRETE	16 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	30 MM
WEIGHT	2,2 KG



IMPACT DRILL  
CT10032

- GEAR RIM CHUCK
- VARIABLE SPEED
- STEP SPEED SELECTION
- ELECTRONIC SPEED ADJUSTMENT
- 2 FUNCTION MODES (DRILLING / IMPACT DRILLING)
- REVERSE FUNCTION
- LOCK-ON FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Depth stop, Additional handle, Drill chuck key.



1050 W

AMPERAGE AT VOLTAGE 220-230 V	4.9 A
NO-LOAD SPEED (GEAR I / II)	0-900 / 0-2500 MIN <sup>-1</sup>
IMPACT RATE (GEAR I / II)	0-14400 / 0-40000 MIN <sup>-1</sup>
CHUCK TIGHTENING RANGE	3-16 MM
DRILLING OUTPUT IN CONCRETE	20/16 MM
DRILLING OUTPUT IN STEEL	13/13 MM
DRILLING OUTPUT IN WOOD	40/30 MM
WEIGHT	3,4 KG



LOW SPEED DRILL  
CT10148

- GEAR RIM CHUCK
- VARIABLE SPEED
- ELECTRONIC SPEED ADJUSTMENT
- 2 FUNCTION MODES (STIRRING / DRILLING)
- REVERSE FUNCTION
- LOCK-ON FUNCTION

ACCESSORIES INCLUDED  
Depth stop, Additional handle,  
Drill chuck key.



Amperage at voltage 220-230 V	5.45 A
No-load speed	0-1000 min <sup>-1</sup>
Chuck tightening range	3-16 mm
Drilling output in steel	16 mm
Drilling output in wood	40 mm
Max. mixing paddle diameter	130 mm
Weight	3,2 kg

MIXER  
CT10049

- M 14 TOOL HOLDER THREAD
- SOFT START
- VARIABLE SPEED
- STEP SPEED SELECTION
- LOCK-ON FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Mixing paddle, Extension rod, Wrench.



Amperage at voltage 220-230 V	4.8 A
No-load speed (gear I / II)	130-450 / 245-850 min <sup>-1</sup>
Tool holder	M14
Mixing paddle diameter	120 mm
Weight	4,1 kg

MIXER  
CT10182

- M 14 TOOL HOLDER THREAD
- SOFT START
- VARIABLE SPEED
- STEP SPEED SELECTION
- LOCK-ON FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Mixing paddle, Extension rod, Wrench.



Amperage at voltage 220-240 V	6.9 A
No-load speed (gear I / II)	180-480 / 300-750 min <sup>-1</sup>
Tool holder	M14

Max. mixing paddle diameter	160 mm
Weight	4,9 kg

LIGHT ROTARY HAMMER  
CT18180 BMC

- SDS-PLUS CHUCK
- EXTRA GEAR RIM CHUCK WITH SDS PLUS ADAPTER
- ELECTRONIC SPEED ADJUSTMENT
- 3 FUNCTIONS MODE (DRILLING / IMPACT DRILLING / CHISELLING)
- REVERSE FUNCTION
- VARIO-LOCK FUNCTION
- SAFETY CLUTCH
- LOCK-ON FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Depth stop, Additional handle,  
Drill bits 3 pcs, Gear rim chuck (with SDS PLUS shank),  
Drill chuck key, Dust collector.



Amperage at voltage 220-230 V	2.7 A
No-load speed	0-1400 min <sup>-1</sup>
Impact rate	0-4400 min <sup>-1</sup>
Single impact power	1,7 J
Drilling output in concrete	20 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	2,3 kg





**LIGHT ROTARY HAMMER**  
**CT18108 BMC**

800 W

- SDS-PLUS CHUCK
- ELECTRONIC SPEED ADJUSTMENT
- 3 FUNCTIONS MODE (DRILLING / IMPACT DRILLING / CHISELLING)
- VARIO-LOCK MODE
- REVERSE FUNCTION
- SAFETY CLUTCH
- LOCK-ON FUNCTION
- SOFT GRIP

**ACCESSORIES INCLUDED**  
Depth stop, Additional handle,  
Drill bits 3 pcs, Point chisel, Flat chisel,  
Gear rim chuck (with SDS PLUS shank), Drill chuck key.



AMPERAGE AT VOLTAGE 220-230 V	3.8 A
NO-LOAD SPEED	0-1200 MIN <sup>-1</sup>
IMPACT RATE	0-5300 MIN <sup>-1</sup>
SINGLE IMPACT POWER	3,4 J
DRILLING OUTPUT IN CONCRETE	26 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	40 MM
WEIGHT	2,8 KG



**HEAVY ROTARY HAMMER**  
**CT18116 BMC**

1050 W

- SDS-PLUS CHUCK
- 3 MODES(DRILLING / IMPACT DRILLING / CHISELLING)
- ANTI-VIBRATIONS SYSTEM
- SAFETY CLUTCH
- SOFT GRIP

**ACCESSORIES INCLUDED**  
Depth stop, Additional handle,  
Drill bits 3 pcs, Point chisel,  
Flat chisel, Dust collector,  
Container with lubricant,  
Flange wrench.



AMPERAGE AT VOLTAGE 220-230 V	4.9 A
NO-LOAD SPEED	750 MIN <sup>-1</sup>
IMPACT RATE	2800 MIN <sup>-1</sup>
SINGLE IMPACT POWER	4,8 J
DRILLING OUTPUT IN CONCRETE	32 MM
DRILLING OUTPUT IN STEEL	13 MM
DRILLING OUTPUT IN WOOD	40 MM
WEIGHT	5 KG

**HEAVY ROTARY HAMMER**  
**CT18118V BMC**

1250 W

- SDS-MAX CHUCK
- VARIABLE SPEED
- 2 MODES (IMPACT DRILLING / CHISELLING)
- VARIO-LOCK MODE
- ANTI-VIBRATIONS SYSTEM
- SAFETY CLUTCH
- SOFT GRIP

**ACCESSORIES INCLUDED**  
Depth stop, Additional handle,  
Drill bits 3 pcs, Point chisel,  
Flat chisel, Dust collector,  
Container with lubricant.



AMPERAGE AT VOLTAGE 220-230 V	5.6 A
NO-LOAD SPEED	0-410 MIN <sup>-1</sup>
IMPACT RATE	0-3000 MIN <sup>-1</sup>
SINGLE IMPACT POWER	0-10 J
DRILLING OUTPUT IN CONCRETE	40 MM
WEIGHT	7 KG



HEAVY ROTARY HAMMER  
CT18216V BMC

1500 W  
NEW


- BRUSHLESS MOTOR
- SDS-MAX CHUCK
- VARIABLE SPEED
- 2 FUNCTION MODES (IMPACT DRILLING / CHISELING)
- VARIO-LOCK MODE
- ANTI-VIBRATIONS SYSTEM
- SAFETY CLUTCH
- SOFT GRIP

ACCESSORIES INCLUDED  
Container with lubricant,  
Additional handle.




BRUSHLESS

AMPERAGE AT VOLTAGE 220-230 V	7.2 A
NO-LOAD SPEED	155-310 MIN <sup>-1</sup>
IMPACT RATE	1500-3000 MIN <sup>-1</sup>
SINGLE IMPACT POWER	15 J
CHUCK TYPE	SDS-MAX
DRILLING OUTPUT IN CONCRETE	48 MM
WEIGHT	9 KG

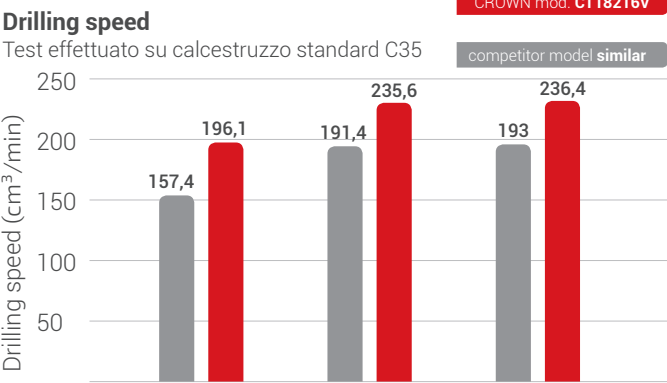

FOCUS ON

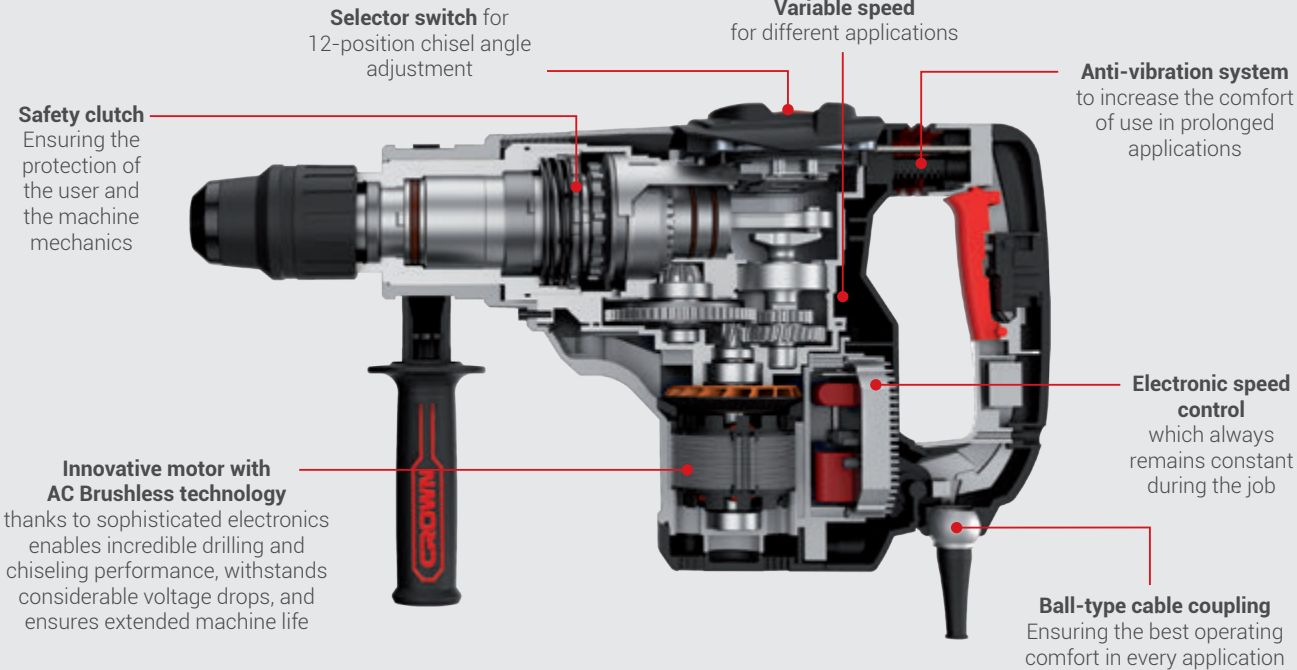



HEAVY ROTARY HAMMER  
CT18190 BMC

1700 W

- SDS-MAX CHUCK
- VARIABLE SPEED
- 2 FUNCTION MODES (IMPACT DRILLING / CHISELLING)
- VARIO-LOCK MODE
- ANTI-VIBRATIONS SYSTEM
- SAFETY CLUTCH
- POWER LIGHT INDICATOR
- CARBON BRUSH REPLACEMENT INDICATOR LIGHT

ACCESSORIES INCLUDED  
Additional handle, Container with lubricant,  
Carbon brush.



AMPERAGE AT VOLTAGE 220-240 V	8 A
NO-LOAD SPEED	100-220 MIN <sup>-1</sup>
IMPACT RATE	1750-2150 MIN <sup>-1</sup>
SINGLE IMPACT POWER	5-19 J
CHUCK TYPE	SDS-MAX
DRILLING OUTPUT IN CONCRETE	55 MM
WEIGH	10 KG



HAMMER  
CT18221 BMC

950 W  
NEW

- SDS-PLUS CHUCK
- ANTI-VIBRATIONS SYSTEM
- POWER LIGHT INDICATOR
- VARIO-LOCK MODE
- SOFT GRIP

ACCESSORIES INCLUDED  
Additional handle, Container with lubricant,  
Carbon brush.



AMPERAGE AT VOLTAGE 220-240 V	3.2 A
IMPACT RATE	4300 MIN <sup>-1</sup>
SINGLE IMPACT POWER	5 J
CHUCK TYPE	SDS-PLUS
WEIGHT	3,9 KG



**HAMMER**  
**CT18173M BMC**

- SDS-MAX CHUCK
- LOCK-ON FUNCTION
- SOFT GRIP

**ACCESSORIES INCLUDED**  
Additional handle, Point chisel, Flat chisel,  
Flange wrench, Tube with lubricant, Carbon brush.



AMPERAGE AT VOLTAGE 220-230 V	5.9 A
IMPACT RATE	2400 MIN <sup>-1</sup>
SINGLE IMPACT POWER	20 J
WEIGHT	7,5 KG

**1300 W**

**HAMMER**  
**CT18123V BMC**

- SDS-MAX CHUCK
- IMPACT RATE REGULATION
- VARIO-LOCK MODE
- ANTI-VIBRATIONS SYSTEM
- CARBON BRUSH REPLACEMENT INDICATOR LIGHT
- SOFT GRIP

**ACCESSORIES INCLUDED**  
Depth stop, Additional handle, Drill bits 3pcs, Point chisel,  
Flat chisel, Dust collector, Container with lubricant.



AMPERAGE AT VOLTAGE 220-230 V	6.5 A
IMPACT RATE	900-1900 MIN <sup>-1</sup>
SINGLE IMPACT POWER	8-25 J
WEIGHT	10,96 KG

**1500 W**

**BREAKER**  
**CT18124 BMC**

- HEX-30 TOOL HOLDER
- ANTI-VIBRATIONS SYSTEM
- CARBON BRUSH REPLACEMENT INDICATOR LIGHT
- POWER LIGHT INDICATOR
- SOFT GRIP

**ACCESSORIES INCLUDED**  
Additional handle, Point chisel, Flat chisel  
Container with lubricant, Allen key.



AMPERAGE AT VOLTAGE 220-230 V	8.7 A
IMPACT RATE	1600 MIN <sup>-1</sup>
SINGLE IMPACT POWER	48 J
WEIGHT	14,5 KG



**1750 W**



**WALL CHASER**  
**CT13525-125**

- DRY CUTTING
- SPINDLE LOCK
- CUTTING DEPTH ADJUSTMENT
- LOCK-ON FUNCTION
- DUST EXTRACTION SYSTEM
- SOFT GRIP

**ACCESSORI INCLUSI**  
Diamond cutting disc 2 pcs,  
Allen key, Flange wrench,  
Allen key with handle ,  
Break-out tool.



AMPERAGE AT VOLTAGE 220-230 V	7 A
RATED SPEED	8500 MIN <sup>-1</sup>
Ø OF DIAMOND CUTTING DISC	125 MM
BORE Ø OF DIAMOND CUTTING DISC	22,23 MM
MAX. THICKNESS OF DIAMOND CUTTING DISC	2,2 MM
CUTTING DEPTH	5-29 MM
CUTTING WIDTH	8-30 MM
SPINDLE THREAD	M14
WEIGHT	4,85 KG

**1500 W**



ANGLE GRINDER  
CT13501-115R

- M14 SPINDLE THREAD
- SOFT START
- SPINDLE LOCK
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	11000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	3 A
MAX. Ø OF CUTTING DISC	115 MM
MAX. Ø OF GRINDING DISC	115 MM
MAX. Ø OF RUBBER SANDING PLATE	115 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
WEIGHT	1,8 KG

650 W  
ANGLE GRINDER  
CT13499-115R

- M14 SPINDLE THREAD
- SOFT START
- SPINDLE LOCK
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	11000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	3.3 A
MAX. Ø OF CUTTING DISC	115 MM
MAX. Ø OF GRINDING DISC	115 MM
MAX. Ø OF RUBBER SANDING PLATE	115 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
WEIGHT	1,85 KG

ANGLE GRINDER  
CT13499-125R

- M14 SPINDLE THREAD
- SOFT START
- SPINDLE LOCK
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	11000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	3.3 A
MAX. Ø OF CUTTING DISC	125 MM
MAX. Ø OF GRINDING DISC	125 MM
MAX. Ø OF RUBBER SANDING PLATE	125 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
WEIGHT	1,9 KG

720 W



ANGLE GRINDER  
CT13295

- M14 SPINDLE THREAD
- SOFT START
- SPINDLE LOCK
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	11000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	3.89 A
MAX. Ø OF CUTTING DISC	115 MM
MAX. Ø OF GRINDING DISC	115 MM
MAX. Ø OF RUBBER SANDING PLATE	115 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
WEIGHT	2,05 KG

860 W

ANGLE GRINDER  
CT13571-115R

- M14 SPINDLE THREAD
- SPINDLE LOCK
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	12000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	3.9 A
MAX. Ø OF CUTTING DISC	115 MM
MAX. Ø OF GRINDING DISC	115 MM
MAX. Ø OF RUBBER SANDING PLATE	115 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
WEIGHT	1,71 KG

900 W  
NEW



ANGLE GRINDER  
CT13571-125R

- M 14 SPINDLE THREAD
- SPINDLE LOCK
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



SMALL BODY

900 W  
NEW

RATED SPEED	12000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	3.9 A
MAX. Ø OF CUTTING DISC	125 MM
MAX. Ø OF GRINDING DISC	125 MM

MAX. Ø OF RUBBER SANDING PLATE	125 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
WEIGHT	1,75 KG

ANGLE GRINDER  
CT13502-115R

1010 W

- M 14 SPINDLE THREAD
- SOFT START
- SPINDLE LOCK
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	11000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	4.5 A
MAX. Ø OF CUTTING DISC	115 MM
MAX. Ø OF GRINDING DISC	115 MM
MAX. Ø OF RUBBER SANDING PLATE	115 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
WEIGHT	2 KG

ANGLE GRINDER  
CT13502-125R

1010 W

- M 14 SPINDLE THREAD
- SOFT START
- SPINDLE LOCK
- RESTART PROTECTION
- TWO-POSITION ON / OFF SWITCH

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	11000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	4.5 A
MAX. Ø OF CUTTING DISC	125 MM
MAX. Ø OF GRINDING DISC	125 MM
MAX. Ø OF RUBBER SANDING PLATE	125 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
WEIGHT	2,05 KG

ANGLE GRINDER  
CT13506-125V

1200 W

- M 14 SPINDLE THREAD
- VARIABLE SPEED
- SPINDLE LOCK
- LOCK-OFF FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	0-11000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	5.4 A
MAX. Ø OF CUTTING DISC	125 MM
MAX. Ø OF GRINDING DISC	125 MM
MAX. Ø OF RUBBER SANDING PLATE	125 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
WEIGHT	2,4 KG

ANGLE GRINDER  
CT13507-150

1500 W

- M 14 SPINDLE THREAD
- SPINDLE LOCK
- LOCK-OFF FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	9500 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	7 A
MAX. Ø OF CUTTING DISC	150 MM
MAX. Ø OF GRINDING DISC	150 MM
MAX. Ø OF RUBBER SANDING PLATE	150 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	75 MM
MAX. Ø OF CUP WIRE BRUSH	75 MM
WEIGHT	3,48 KG



ANGLE GRINDER  
CT13500-180S

- M14 SPINDLE THREAD
- SPINDLE LOCK
- SOFT START
- LOCK-OFF FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	8500 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	10 A
MAX. Ø OF CUTTING DISC	180 MM
MAX. Ø OF GRINDING DISC	180 MM
MAX. Ø OF RUBBER SANDING PLATE	180 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	100 MM
MAX. Ø OF CUP WIRE BRUSH	100 MM
WEIGHT	5,2 KG

2200 W  
ANGLE GRINDER  
CT13500-230S

- M14 SPINDLE THREAD
- SOFT START
- SPINDLE LOCK
- LOCK-OFF FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	6500 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	10 A
MAX. Ø OF CUTTING DISC	230 MM
MAX. Ø OF GRINDING DISC	230 MM
MAX. Ø OF RUBBER SANDING PLATE	230 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	100 MM
MAX. Ø OF CUP WIRE BRUSH	100 MM
WEIGHT	5,4 KG

ANGLE GRINDER  
CT13500-230S BMC

- M14 SPINDLE THREAD
- SOFT START
- SPINDLE LOCK
- LOCK-OFF FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



Rated speed	6500 min <sup>-1</sup>
Amperage at voltage 220-230 V	10 A
Max. Ø of cutting disc	230 mm
Max. Ø of grinding disc	230 mm
Max. Ø of rubber sanding plate	230 mm
Max. Ø of circular wire brush	100 mm
Max. Ø of cup wire brush	100 mm
Weight	5,4 kg

2200 W  
ANGLE GRINDER  
CT13070

- M14 SPINDLE THREAD
- SPINDLE LOCK
- LOCK-ON FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	6500 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	10 A
MAX. Ø OF CUTTING DISC	230 MM
MAX. Ø OF GRINDING DISC	230 MM
MAX. Ø OF RUBBER SANDING PLATE	230 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	100 MM
MAX. Ø OF CUP WIRE BRUSH	100 MM
WEIGHT	5,6 KG

ANGLE GRINDER  
CT13489-230S

- M14 SPINDLE THREAD
- SOFT START
- SPINDLE LOCK
- LOCK-OFF FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Flange wrench, Additional handle,  
Protective casing.



RATED SPEED	6500 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	12 A
MAX. Ø OF CUTTING DISC	230 MM
MAX. Ø OF GRINDING DISC	230 MM

MAX. Ø OF RUBBER SANDING PLATE	230 MM
MAX. Ø OF CIRCULAR WIRE BRUSH	100 MM
MAX. Ø OF CUP WIRE BRUSH	100 MM
WEIGHT	5,9 KG



POLISHER

CT13302

1300 W

- M14 TOOL HOLDER THREAD
- VELCRO FIXING SYSTEM
- VARIABLE SPEED
- ROTATION SPEED STABILIZATION SYSTEM
- SPINDLE LOCK
- LOCK-ON FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Additional handle, Rubber plate  
Polishing bonnet, Wrench.



AMPERAGE AT VOLTAGE 220-230 V	6.5 A
RATED SPEED	1000-3000 MIN <sup>-1</sup>
MAX. Ø OF RUBBER PLATE	180 MM
WEIGHT	3,1 KG



POLISHER

CT13528

1500 W

- M14 SPINDLE THREAD
- VARIABLE SPEED
- SOFT START
- SPINDLE LOCK
- ANTI-VIBRATIONS SYSTEM

ACCESSORIES INCLUDED  
Additional handle, Rubber plate  
Polishing bonnet, Wrench.



AMPERAGE AT VOLTAGE 220-230 V	6.5 A
RATED SPEED	520-4000 MIN <sup>-1</sup>
MAX. Ø OF RUBBER PLATE	180 MM
WEIGHT	2,6 KG

STRAIGHT GRINDER

CT13307

600 W

- VARIABLE SPEED
- TWO-POSITION ON / OFF SWITCH
- SOFT GRIP

ACCESSORIES INCLUDED  
Open spanner, Additional handle.



AMPERAGE AT VOLTAGE 220-230 V	2.8 A
NO-LOAD SPEED	12000-27000 MIN <sup>-1</sup>
NUMBER OF RPM STAGES	6
SPINDLE INNER DIAMETER	10 MM
COLLET DIAMETER	6 MM
WEIGHT	1,68 KG

STRAIGHT GRINDER

CT13308

600 W

- VARIABLE SPEED
- TWO-POSITION ON / OFF SWITCH

ACCESSORIES INCLUDED  
Open spanner, Pin.



AMPERAGE AT VOLTAGE 220-230 V	2.8 A
NO-LOAD SPEED	12000-27000 MIN <sup>-1</sup>
NUMBER OF RPM STAGES	6
SPINDLE INNER DIAMETER	10 MM
COLLET DIAMETER	6 MM
WEIGHT	1,46 KG



BURNISHING MACHINE

CT13551-110RSV

• VARIABLE SPEED

• ROTATION SPEED STABILIZATION SYSTEM

• SOFT START


• SPINDLE LOCK

• RESTART PROTECTION

• TWO-POSITION ON / OFF SWITCH

ACCESSORIES INCLUDED

Additional handle, Protective casing, Dowel 2 pcs, Vacuum cleaner adapter, Allen key.



1400 W

RATED SPEED	1000-4000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	6.6 A
SPINDLE Ø	19 MM
MAX. Ø OF BRUSH	110 MM
MAX. WIDTH OF BRUSH	100 MM
WEIGHT	3,1 KG

BRUSH FOR WOOD, FINE FINISHING

CAQ-N1101460



DIMENSION	Ø 110 X W 100 X Ø 19 MM
WIRE Ø	1,4 MM
MAX. SPEED	4000 MIN-1
WEIGHT	0,4 KG
SUITABLE FOR	SOFT WOOD, AGED WOOD
FINISHING	FINE FINISHING



BRUSH FOR METAL AND WOOD, FINE FINISHING

CAQ-F11080



DIMENSION	Ø 110 X W 100 X Ø 19 MM
GRIT	P80
MAX. SPEED	4000 MIN-1
WEIGHT	0,5 KG
SUITABLE FOR	METAL, WOOD POLISH
FINISHING	FINE FINISHING



WOOL POLISHING BRUSH

CAQ-L110



DIMENSION	Ø 110 X W 100 X Ø 19 MM
MATERIAL	WOOL
MAX. SPEED	4000 MIN-1
SUITABLE FOR	METAL, STAINLESS STEEL
FINISHING	POLISHING




NON-WOVEN POLISHING BRUSH

CAQ-C110




DIMENSION	Ø 110 X W 100 X Ø 19 MM
MATERIAL	NON-WOVEN
MAX. SPEED	4000 MIN-1
SUITABLE FOR	METAL, STAINLESS STEEL
FINISHING	POLISHING




BRUSH FOR WOOD, ROUGH FINISHING

CAQ-V11003




DIMENSION	Ø 110 X W 100 X Ø 19 MM
WIRE Ø	0,3 MM
MAX. SPEED	4000 MIN-1
WEIGHT	1,32 KG
SUITABLE FOR	HARD WOOD, AGED WOOD
FINISHING	REMOVE PAINT



BRUSH FOR METAL AND STAINLESS STEEL, FINE FINISHING

CAQ-S11080



DIMENSION	Ø 110 X W 100 X Ø 19 MM
GRIT	P80
MAX. SPEED	4000 MIN-1
WEIGHT	0,46 KG
SUITABLE FOR	METAL, STAINLESS STEEL
FINISHING	FINE FINISHING



LAMELLAR ABRASIVE BRUSH

NEW


CAQ-P11046

CAQ-P11060

CAQ-P11080

CAQ-P11120

CAQ-P11180




DIMENSION	Ø 110 X W 100 X Ø 19 MM
GRIT	P46 / P60 / P80 / P120 / P180
MAX. SPEED	4000 MIN-1
SUITABLE FOR	METAL, STAINLESS STEEL
FINISHING	FINE FINISHING



HEMP POLISHING BRUSH

CAQ-H110




DIMENSION	Ø 110 X W 100 X Ø 19 MM
MATERIAL	HEMP
MAX. SPEED	4000 MIN-1
SUITABLE FOR	METAL, STAINLESS STEEL
FINISHING	POLISHING




HARD SPONGE ABRASIVE BRUSH

CAQ-B11060



DIMENSION	Ø 110 X W 100 X Ø 19 MM
GRIT	P60
MAX. SPEED	4000 MIN-1
SUITABLE FOR	MULTI-MATERIAL
FINISHING	FINE FINISHING



38

CROWN CATALOG EUROPE 2024





**BENCH GRINDER**  
**CT13545**

- ADJUSTABLE WORK PIECE SUPPORT
- ADJUSTABLE SPARK PROTECTOR

**ACCESSORIES INCLUDED**

Mounting screw with nut 2 pcs,  
Workpiece support 2 pcs,  
Screw with fly-nut 2 pcs,  
Spark protector 2 pcs,  
Grinding disc 2 pcs,



AMPERAGE AT VOLTAGE 220-230 V	0.7 A
NO-LOAD SPEED	2840 MIN <sup>-1</sup>
Ø OF GRINDING DISC	125 / 125 MM
BORE Ø OF GRINDING DISC	12,7 / 32 MM
THICKNESS OF GRINDING DISC	16 / 16 MM
WEIGHT	5 KG

**170 W**

**BENCH GRINDER**  
**CT13546**

- ADJUSTABLE WORK PIECE SUPPORT
- ADJUSTABLE SPARK PROTECTOR

**ACCESSORIES INCLUDED**

Mounting screw with nut 2 pcs,  
Workpiece support 2 pcs,  
Screw with fly-nut 2 pcs,  
Spark protector 2 pcs,  
Grinding disc 2 pcs,



AMPERAGE AT VOLTAGE 220-230 V	1.1 A
NO-LOAD SPEED	2840 MIN <sup>-1</sup>
Ø OF GRINDING DISC	150 / 150 MM
BORE Ø OF GRINDING DISC	12,7 / 32 MM
THICKNESS OF GRINDING DISC	20 / 20 MM
WEIGHT	7 KG

**BENCH GRINDER**  
**CT13547**

- ADJUSTABLE WORK PIECE SUPPORT
- ADJUSTABLE SPARK PROTECTOR

**ACCESSORIES INCLUDED**

Mounting screw with nut 2 pcs,  
Workpiece support 2 pcs,  
Screw with fly-nut 2 pcs,  
Spark protector 2 pcs,  
Grinding disc 2 pcs,



AMPERAGE AT VOLTAGE 220-230 V	1.7 A
NO-LOAD SPEED	2840 MIN <sup>-1</sup>
Ø OF GRINDING DISC	200 / 200 MM
BORE Ø OF GRINDING DISC	12,7 / 32 MM
THICKNESS OF GRINDING DISC	20 / 20 MM
WEIGHT	12 KG

**250 W**

**350 W**



CUT-OFF SAW
CT15232

- SPINDLE LOCK
- MITRE ANGULAR ADJUSTMENT
- CARRIAGE POSITION
- LOCK-OFF FUNCTION

ACCESSORIES INCLUDED
Cutting disc.

Table with 2 columns: Specification and Value. Rows include: AMPERAGE AT VOLTAGE 220-230 V (10.6 A), MAX. Ø OF CUTTING DISC (355 MM), NO-LOAD SPEED (3900 MIN⁻¹), BORE Ø OF CUTTING DISC (25,4 MM), MAX. THICKNESS OF CUTTING DISC (3,5 MM), MAXIMUM SIZE OF CUT-OFF WORKPIECE (various dimensions), and WEIGHT (18,25 KG).



2200 W

JIGSAW
CT15212

- STROKE RATE REGULATION
- 4-STAGE PENDULUM
- ANGULAR ADJUSTMENT
- SAW BLADE EASY CHANGE
- LOCK-ON FUNCTION
- DUST EXTRACTION SYSTEM

ACCESSORIES INCLUDED
Saw blade, Wing screw for guide bar, Locating pin, Allen key, Vacuuming connector piece.



550 W

Table with 2 columns: Specification and Value. Rows include: AMPERAGE AT VOLTAGE 220-230 V (2.4 A), STROKE RATE AT NO-LOAD (700-3000 MIN⁻¹), STROKE LENGTH (18 MM), CUTTING ABILITY IN WOOD (65 MM), CUTTING ABILITY IN ALUMINUM (10 MM), CUTTING ABILITY IN STEEL (6 MM), MAX. ANGULARITY OF THE BODY (LEFT / RIGHT) (45°/45°), and WEIGHT (1,9 KG).

JIGSAW
CT15189

- STROKE RATE REGULATION
- 4-STAGE PENDULUM
- ANGULAR ADJUSTMENT
- SAW BLADE EASY CHANGE
- LOCK-ON FUNCTION
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED
Saw blade, Wing screw for guide bar, Locating pin, Allen key, Vacuuming connector piece, Guide bar for parallel / circle cutting.



710 W

Table with 2 columns: Specification and Value. Rows include: AMPERAGE AT VOLTAGE 220-230 V (3.1 A), STROKE RATE AT NO-LOAD (700-3000 MIN⁻¹), STROKE LENGTH (26 MM), CUTTING ABILITY IN WOOD (125 MM), CUTTING ABILITY IN ALUMINUM (20 MM), CUTTING ABILITY IN STEEL (10 MM), MAX. ANGULARITY OF THE BODY (LEFT / RIGHT) (45°/45°), and WEIGHT (2,9 KG).

JIGSAW
CT15181

- STROKE RATE REGULATION
- 4-STAGE PENDULUM
- ANGULAR ADJUSTMENT
- SAW BLADE EASY CHANGE
- TWO-POSITION ON / OFF SWITCH
- DUST BLOWING
- DUST EXTRACTION SYSTEM
- ERGONOMIC HANDLE

ACCESSORIES INCLUDED
Allen key, Saw blade, Locating pin, Parallel guide, Vacuuming connector piece.

Table with 2 columns: Specification and Value. Rows include: AMPERAGE AT VOLTAGE 220-230 V (3.1 A), STROKE RATE AT NO-LOAD (700-3000 MIN⁻¹), STROKE LENGTH (26 MM), CUTTING ABILITY IN WOOD (120 MM), CUTTING ABILITY IN ALUMINUM (20 MM), CUTTING ABILITY IN STEEL (10 MM), MAX. ANGULARITY OF THE BODY (LEFT / RIGHT) (45° / 45°), and WEIGHT (3 KG).



710 W



SABRE SAW  
CT15133

- STROKE RATE REGULATION
- ELECTRONIC SPEED ADJUSTMENT
- SAW BLADE EASY CHANGE
- LOCK-ON FUNCTION
- REAR D-HANDLE
- SOFT GRIP

ACCESSORIES INCLUDED  
Saw blade.



AMPERAGE AT VOLTAGE 220-230 V	4.5 A
STROKE RATE AT NO-LOAD	300-2400 MIN <sup>-1</sup>
STROKE LENGTH	28 MM
CUTTING ABILITY IN WOOD	250 MM
CUTTING ABILITY IN STEEL (PROFILE / PIPE)	8 / 120 MM
WEIGHT	3,7 KG



CIRCULAR SAW  
CT15188-190

- SPINDLE LOCK
- CUTTING DEPTH ADJUSTMENT
- ANGULAR ADJUSTMENT
- LOCK-OFF FUNCTION
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Circular saw blade,  
Wrench, Parallel guide.



AMPERAGE AT VOLTAGE 220-230 V	6.8 A
NO-LOAD SPEED	5500 MIN <sup>-1</sup>
MIN. / MAX. Ø OF CIRCULAR SAW BLADE	185 / 190 MM
BORE Ø OF CIRCULAR SAW BLADE	20 MM
MAX. THICKNESS OF CIRCULAR SAW BLADE	2 MM
MAX. CUTTING DEPTH BY 90°	66 MM
MAX. CUTTING DEPTH BY 45°	46 MM
WEIGHT	4,4 KG

1500 W

CIRCULAR SAW  
CT15187-165

- SPINDLE LOCK
- CUTTING DEPTH ADJUSTMENT
- ANGULAR ADJUSTMENT
- LOCK-OFF FUNCTION
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Circular saw blade, Wrench,  
Parallel guide.



AMPERAGE AT VOLTAGE 220-230 V	5.6 A
NO-LOAD SPEED	5500 MIN <sup>-1</sup>
MIN. / MAX. Ø OF CIRCULAR SAW BLADE	160 / 166 MM
BORE Ø OF CIRCULAR SAW BLADE	20 MM
MAX. THICKNESS OF CIRCULAR SAW BLADE	2 MM
MAX. CUTTING DEPTH BY 90°	54 MM
MAX. CUTTING DEPTH BY 45°	38 MM
WEIGHT	3,9 KG

1200 W

CIRCULAR SAW  
CT15210-235

- SPINDLE LOCK
- CUTTING DEPTH ADJUSTMENT
- ANGULAR ADJUSTMENT
- LOCK-OFF FUNCTION
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Circular saw blade,  
Wrench, Parallel guide.



AMPERAGE AT VOLTAGE 220-230 V	10 A
NO-LOAD SPEED	4500 MIN <sup>-1</sup>
MIN. / MAX. Ø OF CIRCULAR SAW BLADE	230 / 235 MM
BORE Ø OF CIRCULAR SAW BLADE	30 MM
MAX. THICKNESS OF CIRCULAR SAW BLADE	2,4 MM
MAX. CUTTING DEPTH BY 90°	85 MM
MAX. CUTTING DEPTH BY 45°	60 MM
WEIGHT	7,6 KG

2000 W



PLUNGE SAW  
CT15134-165

1300 W

- VARIABLE SPEED
- ROTATION SPEED STABILIZATION SYSTEM
- SOFT START
- OVERLOAD PROTECTION
- CUTTING DEPTH ADJUSTMENT
- ANGULAR ADJUSTMENT
- SAFETY LOCK

ACCESSORIES INCLUDED  
Circular saw blade, Allen key,  
Parallel guide.



CUTTING DEPTH ADJUSTMENT



VARIABLE SPEED



AMPERAGE AT VOLTAGE 220-230 V	6.2 A
NO-LOAD SPEED	2000-5000 MIN <sup>-1</sup>
CIRCULAR SAW BLADE Ø	165 MM
CIRCULAR SAW BLADE BORE Ø	20 MM
MAX. THICKNESS OF CIRCULAR SAW BLADE	2,4 MM
MAX. CUTTING DEPTH BY 90°	55 MM
MAX. CUTTING DEPTH BY 45°	38 MM
WEIGHT	4,7 KG

PLUNGE SAW GUIDE  
CAXS-BA140

- COMPATIBLE WITH: CT15134-165
- EQUIPPED WITH CONNECTION KIT, TO JOIN A SECOND GUIDE TOGETHER.



L 140,5 x W 22 x H 2 cm

WEIGHT	2,1 KG
--------	--------





SLIDE MITRE SAW  
CT15233P

- SPINDLE LOCK
- ANGULAR ADJUSTMENT
- MITRE ANGULAR ADJUSTMENT
- CLAMPING DEVICE
- BOTH-SIDED TABLE EXTENSIONS
- KERF LASER INDICATOR
- INTEGRATED LED LIGHT
- CARRIAGE POSITION

ACCESSORIES INCLUDED  
Saw blade, Extension bracket, Clamping screw,  
Dust bag, Allen key.

AMPERAGE AT VOLTAGE 220-230 V	8.7 A
NO-LOAD SPEED	5500 MIN <sup>-1</sup>
CIRCULAR SAW BLADE Ø	255 MM
MIN. / MAX. BORE Ø OF SAW BLADE	16 (OPTIONAL EXTRA) / 30 MM
MAX. THICKNESS OF CIRCULAR SAW BLADE	2.8 MM
MAX. CUTTING DEPTH AT 0° / 90° (H X W)	80 X 340 MM
MAX. CUTTING DEPTH AT 45° / 90° (H X W)	80 X 240 MM
MAX. CUTTING DEPTH AT 0° / 45° (H X W)	50 X 340 MM
MAX. CUTTING DEPTH AT 45° / 45° (H X W)	50 X 240 MM
WEIGHT	16,5 KG



1800 W

COMBO MITRE SAW  
CT15305KF

- 3 MODES HANDLE POSITION
- SPINDLE LOCK
- ANGULAR ADJUSTMENT
- MITRE ANGULAR ADJUSTMENT
- CLAMPING DEVICE

ACCESSORIES INCLUDED  
Saw blade, Clamping screw, Dust bag, Allen key.

AMPERAGE AT VOLTAGE 220-230 V	7.7 A
NO-LOAD SPEED	4200 MIN <sup>-1</sup>
CIRCULAR SAW BLADE Ø	305 MM
CIRCULAR SAW BLADE BORE Ø	30 MM
MAX. CUTTING DEPTH AT 0° / 90° (H X W)	100 X 165 MM
MAX. CUTTING DEPTH AT 45° / 90° (H X W)	100 X 105 MM
MAX. CUTTING DEPTH AT 0° / 45° (H X W)	65 X 165 MM
MAX. CUTTING DEPTH AT 45° / 45° (H X W)	70 X 45 MM
WEIGHT	18 KG



1700 W  
NEW

TABLE SAW  
CT15286S

- CUTTING DEPTH ADJUSTMENT
- ANGULAR ADJUSTMENT
- MITRE ANGULAR ADJUSTMENT
- OVERLOAD PROTECTION
- SLIDING WORKING TABLE
- DUST EXTRACTION SYSTEM

ACCESSORIES INCLUDED  
Dust extraction pipe, Movable protection cover,  
Saw blade, Angular stop, Parallel guide, Push  
stick, Wrench 2 pcs.

AMPERAGE AT VOLTAGE 220-240 V	13 A
NO-LOAD SPEED	5000 MIN <sup>-1</sup>
RATED POWER	500 W
NO-LOAD SPEED	16000 MIN <sup>-1</sup>
CIRCULAR SAW BLADE Ø	254 MM
CIRCULAR SAW BLADE BORE Ø	25,4 MM
MAX. THICKNESS OF CIRCULAR SAW BLADE	2.8 MM
MAX. CUTTING DEPTH AT 90°	86 MM
MAX. CUTTING DEPTH AT 45°	60 MM
WEIGHT	34 KG



3000 W  
NEW



ROTARY SANDER  
CT13394

- VELCRO FIXING SYSTEM
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Sanding paper, Dust bag.



AMPERAGE AT VOLTAGE 220-230 V	1 A
NO-LOAD SPEED	12000 MIN <sup>-1</sup>
NO-LOAD OSCILLATIONS RATE	24000 MIN <sup>-1</sup>
ECCENTRICITY	2 MM
SANDING PLATE DIAMETER	125 MM
WEIGHT	1,5 KG

ROTARY SANDER  
CT13395

- VELCRO FIXING SYSTEM
- VARIABLE SPEED
- LOCK-ON FUNCTION
- DUST EXTRACTION SYSTEM
- REAR D-HANDLE
- SOFT GRIP

ACCESSORIES INCLUDED  
Sanding paper, Dust bag.



AMPERAGE AT VOLTAGE 220-230 V	1.9 A
NO-LOAD SPEED (GEAR I / II)	4000-13000 MIN <sup>-1</sup>
NO-LOAD OSCILLATIONS RATE	8000-26000 MIN <sup>-1</sup>
ECCENTRICITY	2 MM
SANDING PLATE DIAMETER	150 MM
WEIGHT	2,4 KG

ORBITAL SANDER  
CT13638

- VELCRO FIXING SYSTEM
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Sanding paper, Dust bag.

ACCESSORIES INCLUDED  
Sanding paper, Dust bag.



NO-LOAD SPEED	13000 MIN <sup>-1</sup>
NO-LOAD OSCILLATION RATE	26000 MIN <sup>-1</sup>
ORBITAL DIAMETER	1,6 MM

240 W

ROTARY SANDER  
CT13560V

- VELCRO FIXING SYSTEM
- VARIABLE SPEED
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Sanding paper,  
Dust-collecting container.



AMPERAGE AT VOLTAGE 220-230 V	1.4 A
NO-LOAD SPEED (GEAR I / II)	6000-13000 MIN <sup>-1</sup>
NO-LOAD OSCILLATIONS RATE	12000-26000 MIN <sup>-1</sup>
ECCENTRICITY	2 MM
SANDING PLATE DIAMETER	125 MM
WEIGHT	1,5 KG

450 W

ORBITAL SANDER  
CT13637

- VELCRO FIXING SYSTEM
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Sanding paper, Dust bag.



NO-LOAD SPEED	13000 MIN <sup>-1</sup>
NO-LOAD OSCILLATION RATE	26000 MIN <sup>-1</sup>
ORBITAL DIAMETER	1,6 MM
SANDING SURFACE SIZE	140 X 140 X 80 MM
SANDING PAPER SIZE (CLAMP / VELCRO)	140 X 140 X 80 MM
WEIGHT	1,3 KG

300 W

180 W  
NEW

240 W  
NEW



ORBITAL SANDER  
CT13633V

- VELCRO AND CLAMPING FIXING SYSTEM
- VARIABLE SPEED
- LOCK-ON FUNCTION
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Sanding paper, Dust bag.



380 W  
NEW

NO-LOAD SPEED	7000-13000 MIN <sup>-1</sup>
NO-LOAD OSCILLATION	14000-26000 MIN <sup>-1</sup>
ORBITAL DIAMETER	1 MM

SANDING SURFACE SIZE	115 X 230 MM
SANDING PAPER SIZE (CLAMP / VELCRO)	115 X 280 MM / 115 X 230 MM
WEIGHT	2,2 KG



POWER PLANER  
CT14019X

- INTERCHANGEABLE BLADES
- PLANING DEPTH REGULATOR
- V-GROOVE
- REBATING
- SAFETY STOP
- LOCK-OFF FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Vertical stop, Box wrench,  
Side stop,  
Wing screw for guide bar.



710 W

AMPERAGE AT VOLTAGE 220-230 V	3.3 A
NO-LOAD SPEED	16000 MIN <sup>-1</sup>
PLANING WIDTH	82 MM
PLANING DEPTH	0-2,5 MM
GROOVING DEPTH	0-15 MM
WEIGHT	2,8 KG

MULTI-FUNCTION TOOL  
CT16008 BMC

- SPECIAL ACCESSORIES CONNECTION
- VELCRO AND CLAMPING FIXING SYSTEM
- VARIABLE SPEED
- SOFT START
- SOFT GRIP

ACCESSORIES INCLUDED  
Additional handle, Vacuum cleaner adapter,  
Plunge cutting saw blade, Scraper, Segment saw blade,  
Sanding plate (velcro type), Sanding sheet (velcro type)



500 W  
NEW

AMPERAGE AT VOLTAGE 220-230 V	2.1 A
NO-LOAD SPEED	8000-16000 MIN <sup>-1</sup>

OSCILLATION ANGLE LEFT/RIGHT	5°
WEIGHT	1,42 KG



EDGE TRIMMER  
CT11023S

- VARIABLE SPEED
- SOFT START
- ROTATION SPEED STABILIZATION SYSTEM
- SPINDLE LOCK
- PLUNGE DEPTH CONTROL SYSTEM
- DUST EXTRACTION SYSTEM
- SOFT GRIP

ACCESSORIES INCLUDED  
Trimmer bases 3pcs, Setcrews 2 pcs,  
Movable holder for parallel guide, Parallel guide,  
Roller guide, Dust extractor connecting adaptor,  
Collet Ø6, Collet Ø8, Wrench.

AMPERAGE AT VOLTAGE 220-230 V	3.4 A
NO-LOAD SPEED	13000-33000 MIN <sup>-1</sup>
COLLET INNER Ø	6-8 MM
STROKE OF THE ROUTER BASE	20 MM
WEIGHT	1,45 KG



710 W



EDGE TRIMMER  
CT11020

- SPINDLE LOCK
- PLUNGE DEPTH CONTROL SYSTEM
- LOCK-ON FUNCTION
- DUST EXTRACTION SYSTEM

ACCESSORIES INCLUDED  
Router bit, Parallel guide,  
Dust extractor connecting adaptor,  
Wrench.



430 W

AMPERAGE AT VOLTAGE 220-230 V	2.1 A
NO-LOAD SPEED	26000 MIN <sup>-1</sup>
COLLET INNER Ø	6 MM
STROKE OF THE ROUTER BASE	30 MM
WEIGHT	1,5 KG



PLUNGE ROUTER  
CT11001

- VARIABLE SPEED
- SOFT START
- ROTATION SPEED STABILIZATION SYSTEM
- SPEED ADJUSTMENT
- SPINDLE LOCK
- PLUNGE DEPTH CONTROL SYSTEM
- LOCK-ON FUNCTION
- DUST EXTRACTION SYSTEM

ACCESSORIES INCLUDED  
Bush, Guide bushing,  
Guide bushing fixing screws 3pcs,  
Parallel guide,Dust extractor connecting adaptor,  
Wrench.



2100 W

AMPERAGE AT VOLTAGE 220-230 V	9 A
NO-LOAD SPEED	8000-23000 MIN <sup>-1</sup>
COLLET INNER Ø	12 MM
STROKE OF THE ROUTER BASE	60 MM
WEIGHT	6,3 KG



BISQUIT JOINTER  
CT13587

860 W

- M10 SPINDLE THREAD
- SPINDLE LOCK
- LOCK-ON FUNCTION
- SOFT GRIP

ACCESSORIES INCLUDED  
Dust extraction pipe, Flange wrench,  
Adapter.



NO-LOAD SPEED	11000 MIN <sup>-1</sup>
AMPERAGE AT VOLTAGE 220-230 V	3.8 A
MAX / MIN. Ø OF CIRCULAR SAW BLADE	100 MM
BORE Ø OF CIRCULAR SAW BLADE	22 MM

MAX. THICKNESS OF CIRCULAR SAW BLADE	3,8 MM
MAX. MILLING DEPTH	15 MM
WEIGHT	3,1 KG

BISQUITS FOR BISQUIT JOINTER  
CCB-OX50



SIZE	0
DIMENSION	16 X 48 MM

CCB-10X50



SIZE	10
DIMENSION	21 X 54 MM

CCB-20X50



SIZE	20
DIMENSION	24 X 57 MM



AIR BLOWER  
CT17010V-A

710 W

- VARIABLE SPEED
- 2 FUNCTION MODES (BLOWER / VACUUM CLEANER)
- POSSIBILITY OF STEADY-STATE USE
- LOCK-ON FUNCTION

ACCESSORIES INCLUDED  
Dust collector, Crevice nozzle, Hose.



AMPERAGE AT VOLTAGE 220-230 V	3.08 A
NO-LOAD SPEED	0-14000 MIN <sup>-1</sup>

AIR FLOW RATE	0-4 M <sup>3</sup> /MIN
WEIGHT	1,6 KG



HOT AIR GUN  
CT19022K

- 3-STEP REGULATOR
- COOL STAGE
- TEMPERATURE PROTECTION
- POSSIBILITY OF STEADY-STATE USE

ACCESSORIES INCLUDED  
Scraper, Flat nozzle, Deflector nozzle,  
Reflector nozzle, Point nozzle.



AMPERAGE AT VOLTAGE 220-230 V	7.8 A
TEMPERATURE (STAGE I / II / III)	50 / 450 / 550 °C
AIR FLOW (STAGE I / II / III)	250 / 250 / 500 L/MIN
WEIGHT	0,7 KG

HOT AIR GUN  
CT19023K

- 3-STEP REGULATOR
- COOL STAGE
- TEMPERATURE SETTING
- TEMPERATURE PROTECTION
- POSSIBILITY OF STEADY-STATE USE
- SOFT GRIP

ACCESSORIES INCLUDED  
Scraper, Flat nozzle, Deflector nozzle,  
Reflector nozzle, Point nozzle.



AMPERAGE AT VOLTAGE 220-230 V	8.7 A
TEMPERATURE (STAGE I / II / III)	50 / 50-600 / 50-600 °C
AIR FLOW (STAGE I / II / III)	250 / 250 / 500 L/MIN
WEIGHT	0,9 KG

SPRAY GUN  
CT31013

- VARIABLE PAINT FLOW
- ADJUSTABLE NOZZLE
- EASY FILL
- SAFETY CLEANING
- SOFT GRIP

ACCESSORIES INCLUDED  
Nozzles 2 pcs, Measuring funnel,  
Cleaning rod, Cleaning brush,  
Seal ring 2 pcs,  
Special wrench for nozzles.



400 W

AMPERAGE AT VOLTAGE 220-230 V	1.5 A
FLOW RATE	800 ML/MIN
MAX. SPRAYING PRESSURE	0,1 - 0,2 BAR
MAX. VISCOSITY	70 DIN-S
NOZZLE Ø	2/2,5/3 MM
RESERVOIR CAPACITY	900 ML
WEIGHT	1,5 KG



SPRAY GUN  
CT31014

- VARIABLE PAINT FLOW
- ADJUSTABLE NOZZLE
- EASY FILL
- SAFETY CLEANING
- BUILT-IN STATION
- SOFT GRIP

ACCESSORIES INCLUDED  
Air hose, Hose holder 2 pcs, Measuring funnel,  
Cleaning rod, Cleaning brush,  
Special wrench for nozzles, Carrying belt.

AMPERAGE AT VOLTAGE 220-230 V	2.5 A
FLOW RATE	1000 ML/MIN
MAX. SPRAYING PRESSURE	0,1 - 0,3 BAR
MAX. VISCOSITY	100 DIN-S
NOZZLE Ø	2,5 MM
RESERVOIR CAPACITY	900 ML
WEIGHT	2,9 KG



600 W



ALL-PURPOSE VACUUM CLEANER  
CT99742

- WET/DRY FUNCTION
- AUTOMATIC ENGINE START
- POSSIBILITY TO CONNECT OTHER POWER TOOLS
- CARTRIDGE FILTER
- 5 M CABLE
- 360° ROTATING WHEELS

ACCESSORIES INCLUDED

Extension tubes 2 pcs, 3 mt tube multidiameter with Ø36/37 adapter, Adapter Ø32/36, Crevice nozzle, Multipurpose brush, Anti foam filter, Paper cartridge filter, Fiber dust bag IFA class M. 2 pcs.



MADE IN ITALY

AIR FLOW RATE	60 L/S
VACUITY	21 KPA
CAPACITY	35 L
WEIGHT	7 KG

1000 W



ALL-PURPOSE VACUUM CLEANER  
CT99740

- WET/DRY FUNCTION
- AUTOMATIC ENGINE START
- POSSIBILITY TO CONNECT OTHER POWER TOOLS
- SELF CLEANING FILTER
- M DUST CLASS
- 7 M CABLE
- 360° ROTATING METAL WHEELS

ACCESSORIES INCLUDED

Extension tubes 2 pcs, 3 mt tube multidiameter with Ø32/36 adapter, Adapter Ø32/38, Multipurpose brush, Crevice nozzle, Anti foam filter, Polyester cartridge filter IFA class M, Fiber dust bag IFA class M. 2 pcs.



ALL-PURPOSE VACUUM CLEANER  
CT99741

- WET/DRY FUNCTION
- AUTOMATIC ENGINE START
- POSSIBILITY TO CONNECT OTHER POWER TOOLS
- FULL AUTOMATIC CLEANING FILTER
- M DUST CLASS
- 7 M CABLE
- 360° ROTATING WHEELS

ACCESSORIES INCLUDED

Extension tubes 2 pcs, 3 mt tube multidiameter with Ø32/36 adapter, Adapter Ø32/38, Multipurpose brush, Crevice nozzle, Hard floor insert, Insert for liquid collection, Anti foam filter, Polyester cartridge filter IFA class M, Fiber dust bag IFA class M 2 pcs.



MADE IN ITALY

VACUITY	24 KPA
AIR FLOW RATE	60 L/S
CAPACITY	35 L
WEIGHT	8,5 KG

1200 W



MADE IN ITALY

VACUITY	24 KPA
AIR FLOW RATE	60 L/S
CAPACITY	35 L
WEIGHT	8,5 KG

POLYESTER CARTRIDGE FILTER  
83208BJA



M CLASS  
4300 CM²  
IFA CERTIFIED

COMPATIBILITY:  
CT99740  
CT99741

PAPER CARTRIDGE FILTER  
83207BJA



M CLASS  
4300 CM²  
COMPATIBILITY:  
CT99742

ANTI FOAM FILTER  
83036BHB



COMPATIBILITY:  
CT99740  
CT99741  
CT99742

FIBER DUST BAG  
83148BOK

5 PCS  
30-50 L  
IFA CERTIFIED

COMPATIBILITY:  
CT99740, CT99741  
CT99742





LASER MEASURE  
CT44028

- LASER CLASS 2
- UNITS SELECTION
- TYPE OF MEASURE
- REFERENCE POINT
- CALCULATING
- MEMORY
- BUILT-IN LEVEL
- LCD SCREEN

ACCESSORIES INCLUDED  
Batteries 2 pcs.



0,05 m - 40 m

MEASURING ACCURACY	±2 MM
TIME OF SINGLE MEASUREMENT	0,25 S
LASER TYPE	650 NM
LASER CLASS	II, <1 MW
OPERATING TEMPERATURE RANGE	0 ... +40 °C
STORAGE TEMPERATURE RANGE	-20 ... +65 °C
BATTERY TYPE	2 X 1,5V AAA
WEIGHT	0,089 KG



LASER MEASURE  
CT44034

- LASER CLASS 2
- UNITS SELECTION
- TYPE OF MEASURE
- REFERENCE POINT
- CALCULATING
- MEMORY
- LEVEL SENSOR
- LCD SCREEN

ACCESSORIES INCLUDED  
Batteries 2 pcs, Hand strap.



0,05 m - 80 m

MEASURING ACCURACY	±2 MM
TIME OF SINGLE MEASUREMENT	0,25 S
LASER TYPE	650 NM
LASER CLASS	II, <1 MW
OPERATING TEMPERATURE RANGE	0 ... +40 °C
STORAGE TEMPERATURE RANGE	-20 ... +65 °C
BATTERY TYPE	2 X 1,5V AAA
WEIGHT	0,107 KG

THERMO DETECTOR  
CT44037

- LASER CLASS 2
- UNITS SELECTION
- BACKLIGHT
- LCD SCREEN

ACCESSORIES INCLUDED  
Batteries 2 pcs.



-50 °C ~ +600 °C

MEASURING ACCURACY	±2 MM
TIME OF SINGLE MEASUREMENT	0,25 S
LASER TYPE	650 NM
LASER CLASS	II, <1 MW
OPERATING TEMPERATURE RANGE	0 ... +40 °C
STORAGE TEMPERATURE RANGE	-20 ... +65 °C
BATTERY TYPE	2 X 1,5V AAA
WEIGHT	0,089 KG





LINE LASER  
CT44088-R TB

- GREEN LASER
- HIGH CLASS OSRAM DIODE
- 3 PLANES PROJECTION MODE
- REMOTE CONTROL
- AUTOMATIC SELF-LEVELLING
- UNLEVELLED SIGNAL
- LASER HEAD LOCKING

ACCESSORIES INCLUDED  
Laser target plate, USB cable,  
Magnetic holder, Carrying bag.



PROJECTED BEAMS	2V(360°), 1H(360°)
LEVELLING ACCURACY - VERTICAL / HORIZONTAL BEAM	±3 MM AT 10 M
SELF-LEVELING TIME	≤4 S
SELF-LEVELING RANGE	±4°
LASER CLASS	II
BATTERY TYPE	3,7 V; LI-ION 4AH
THREAD FOR TRIPOD	1/4"
OPERATING TEMPERATURE RANGE	-10 ... +50 °C
STORAGE TEMPERATURE RANGE	-25 ... +70 °C
WEIGHT	1,12 KG



30 m  
NEW

LINE LASER  
CT44047

- GREEN LASER
- HIGH CLASS OSRAM DIODE
- LASER CLASS 2
- 2 LINES PROJECTION MODE
- AUTOMATIC SELF-LEVELLING
- UNLEVELLED SIGNAL
- LASER HEAD LOCKING
- SMART BUTTON

ACCESSORIES INCLUDED  
Spring clamp with swivel holder,  
Storage bag, Carrying bag.



PROJECTED BEAMS	1V, 1H
LASER WAVELENGTH	520 NM
LEVELLING ACCURACY	±3 MM/10 M
SELF-LEVELING RANGE	±4°
BATTERY TYPE	4X AA
OPERATION TEMPERATURE	-10°C~40°C
THREAD FOR TRIPOD	1/4"
WEIGHT	0,26 KG

TELESCOPIC POLE  
CAXL-S31

NEW



MAX. HEIGHT	3,1 M
PIPE DIAMETER	34 MM
THREAD Ø	5/8"
WEIGHT	1,4 KG

TRIPOD FOR LINE LASERS  
CAXL-S12

COMPATIBLE WITH:  
CT44047  
CT44088-R TB

ACCESSORIES INCLUDED  
1/4" adapter.



MAX. HEIGHT	120 CM
HEIGHT	76,5 CM
THREAD Ø	5/8"
WEIGHT	0,841 KG

5/8"

TRIPOD FOR OPTICAL LEVEL  
CAXO-S16

5/8"



MAX. HEIGHT	160 CM
HEIGHT	76,5 CM
THREAD Ø	5/8"
WEIGHT	2,24 KG



DIGITAL CLAMP METER  
CT44053

- AC/DC VOLTAGE
- AC CURRENT
- RESISTANCE
- DIODE TEST
- NCV TEST
- CONTINUITY TEST
- TORCH LIGHT
- MAX VALUE



600 V  
NEW

VOLTAGE AC: MAX VOLT	600 V
VOLTAGE AC: MAX RESOLUTION	1 mV
VOLTAGE DC: MAX VOLT	600 V
VOLTAGE DC: MAX RESOLUTION	0,1 mV
CURRENT AC: MAX AMPS	600 A
CURRENT AC: MAX RESOLUTION	1 mA
RESISTANCE: MAX RESISTANCE	20 MΩ
RESISTANCE: MAX RESOLUTION	0,1 Ω
PLIERS OPENING	25 mm
PESO	0,16 KG

VOLTAGE DETECTOR  
CT44092

- VIBRATION FUNCTION
- AUDIBLE INDICATOR
- DUAL VOLTAGE MODE
- TORCH LIGHT



1000 V  
NEW

AC VOLTAGE RANGE	24 V / 1000 V
FREQUENCY RANGE	50/60 HZ
ALARM MODE	AUDIO/VISUAL/VIBRATION
AUTO POWER OFF	5 MIN
IP RATING	IP67
OPERATING TEMPERATURE RANGE	0 ... +40 °C
STORAGE TEMPERATURE RANGE	-20... +50 °C
HUMIDITY WORKING RANGE	≤80% (NON-CONDENSING)
BATTERY TYPE	2 X 1,5V AAA
WEIGHT	0,072 KG

HIGH-PRESSURE WASHER  
CT42020

- ADJUSTABLE STREAM
- TEMPERATURE PROTECTION
- PRESSURE PROTECTION

ACCESSORIES INCLUDED  
Pressure hose, Spray gun, Jet pipe,  
Extension tube, Filter.



1400 W

AMPERAGE AT VOLTAGE 220-230 V	4,71 A
VOLTAGE / FREQUENCY	220-230 V / 50-60 HZ
MAX. FEED PRESSURE	0,7 MPA
MAX. FEED TEMPERATURE	<60 °C
MIN. FEED FLOW RATE	5,5 L/MIN
RATED PRESSURE	7 MPA
MAX. PRESSURE	10 MPA
FLOW RATE	5,5 L/MIN
MAX. FLOW RATE	6,5 L/MIN
WEIGHT	5,3 KG

DIGITAL MULTIMETER  
CT44051

- AC/DC VOLTAGE
- DC CURRENT
- RESISTANCE
- DIODE TEST
- NCV TEST
- TRANSISTOR TEST
- CONTINUITY TEST
- TORCH LIGHT

ACCESSORIES INCLUDED  
Test leads



600 V  
NEW

VOLTAGE AC: MAX VOLT	600 V
VOLTAGE AC: MAX RESOLUTION	1000 mV
VOLTAGE DC: MAX VOLT	600 V
VOLTAGE DC: MAX RESOLUTION	0,1 mV
CURRENT DC: MAX AMPS	10 A
CURRENT DC: MAX RESOLUTION	1 µA
RESISTANCE: MAX RESISTANCE	20 MΩ
RESISTANCE: MAX RESOLUTION	0,1 Ω
WEIGHT	0,22 KG
PESO	0,22 KG

HIGH-PRESSURE WASHER  
CT42022

- ADJUSTABLE STREAM
- DETERGENT TANK
- HOSE REEL
- TEMPERATURE PROTECTION
- PRESSURE PROTECTION

ACCESSORIES INCLUDED  
Pressure hose, Spray gun,  
Jet pipe, Filter.



1800 W

AMPERAGE AT VOLTAGE 220-230 V	7,63 A
VOLTAGE / FREQUENCY	220-230 V / 50-60 HZ
MAX. FEED PRESSURE	0,7 MPA
MAX. FEED TEMPERATURE	<60 °C
MIN. FEED FLOW RATE	6,7 L/MIN
RATED PRESSURE	10 MPA
MAX. PRESSURE	14 MPA
FLOW RATE	6,7 L/MIN
MAX. FLOW RATE	7,8 L/MIN
WEIGHT	9,6 KG



HIGH-PRESSURE WASHER  
CT42024

- ADJUSTABLE STREAM
- ADJUSTING DETERGENT QUANTITY
- DETERGENT TANK
- HOSE REEL
- TEMPERATURE PROTECTION
- PRESSURE PROTECTION

**ACCESSORIES INCLUDED**  
 Pressure hose, Spray gun,  
 Jet pipe, Filter.



AMPERAGE AT VOLTAGE 220-230 V	8,32 A
VOLTAGE / FREQUENCY	220-230 V / 50-60 HZ
MAX. FEED PRESSURE	0,7 MPA
MAX. FEED TEMPERATURE	<60 °C
MIN. FEED FLOW RATE	6,78 L/MIN
RATED PRESSURE	11 MPA
MAX. PRESSURE	15 MPA
FLOW RATE	6,7 L/MIN
MAX. FLOW RATE	7,8 L/MIN
WEIGHT	13 KG

2000 W  
WELDING MASK  
CAXW-MA1

- SENSITIVITY ADJUSTMENT: STEPLESS CONTROL
- DARK STATE SHIFT: STEPLESS SHIFT

Li-Ion battery & solar supply



FILTER SIZE	110 × 90 × 9 MM
LIGHT SHADE	DIN4
DARK SHADE	DIN9~DIN13
SWITCHING TIME	≤ 3 / 10000 S
DELAY TIME	0,1 S ~ 0,8 S
POWER SUPPLY	3,7 V LI-ION
RATED CAPACITY OF LITHIUM BATTERY	600 MAH
OPERATING TEMPERATURE RANGE	-20 C° ~ +65 C°
PROTECT GRADE AGAINST UVB	DIN16

INVERTER DC MMA WELDING MACHINE  
CT33102 IMC

- MMA WELDING TECHNOLOGY
- IGBT TECHNOLOGY
- TEMPERATURE PROTECTION
- VOLTAGE REDUCTION DEVICE VRD
- CURRENT CONTROL
- EASY START
- WELDING CURRENT METER

**ACCESSORIES INCLUDED**  
 Earth clamp, Earth wire, Electrode holder,  
 Welding mask, Chipping hammer / wire brush,  
 Gloves, Carrying belt.



Rated input voltage	180-265 V
Rated frequency	50/60 HZ
Rated input capacity	6,6 KVA
Rated output voltage	21,2-26 V
No-Load voltage	80 V

Welding electrode diameter	2,5-3,2 MM
Rated duty circle	35%
Efficiency	83%
Weight	3,6 KG

SUBMERSIBLE PUMP  
CT35047

- ENGINE PROTECTION
- AUTOMATIC ON/OFF SWITCH

**ACCESSORIES INCLUDED**  
 Universal fitting.



1200 W

AMPERAGE AT VOLTAGE 220-230 V	4.8 A
MAX. PRODUCTIVITY	6.5 M³/H
MAX. LIFTING HEIGHT	44 M
MAX. IMMERSION DEPTH	7 M
PUMPED LIQUID TEMPERATURE	1-35 °C
MAX. PERCENTAGE OF INSOLUBLE PARTICLES IN A WATER	0,2 %
MAX. Ø OF INSOLUBLE PARTICLES IN THE PUMPED WATER	0,5 MM
EXTERNAL THREAD OF THE OUTLET BRANCH PIPE	61-1/2"
LENGTH OF THE POWER CABLE	10 M
WEIGHT	9,3 KG

SUBMERSIBLE PUMP  
CT35046F

- ENGINE PROTECTION
- FLOATING SWITCH

**ACCESSORIES INCLUDED**  
 Universal fitting.



1200 W

AMPERAGE AT VOLTAGE 220-230 V	4.8 A
MAX. PRODUCTIVITY	6.5 M³/H
MAX. LIFTING HEIGHT	44 M
MAX. IMMERSION DEPTH	7 M
PUMPED LIQUID TEMPERATURE	1-35 °C
MAX. PERCENTAGE OF INSOLUBLE PARTICLES IN A WATER	0,2 %
MAX. Ø OF INSOLUBLE PARTICLES IN THE PUMPED WATER	0,5 MM
INTERNAL THREAD OF THE OUTLET BRANCH PIPE	61"
LENGTH OF THE POWER CABLE	10 M
WEIGHT	9,3 KG



OIL-FREE AIR COMPRESSOR  
CT36090

- MANOMETER
- LCD SCREEN
- VARIABLE PRESSURE
- PRESSURE PROTECTION
- TEMPERATURE PROTECTION

AMPERAGE AT VOLTAGE 220-230 V	6.2 A
RATED SPEED	2800 MIN <sup>-1</sup>
AIR TANK CAPACITY	24 L
PRODUCTIVITY	100 L/MIN
OPERATING PRESSURE	7-8 BAR
WEIGHT	22,5 KG

SILENT MOTOR



1400 W  
NEW

OIL-FREE AIR COMPRESSOR  
CT36094

- MANOMETER
- LCD SCREEN
- VARIABLE PRESSURE
- PRESSURE PROTECTION
- TEMPERATURE PROTECTION

AMPERAGE AT VOLTAGE 220-230 V	12.4 A
RATED SPEED	2800 MIN <sup>-1</sup>
AIR TANK CAPACITY	50 L
PRODUCTIVITY	200 L/MIN
OPERATING PRESSURE	8 BAR
WEIGHT	37 KG

SILENT MOTOR



2800 W  
NEW

OIL-FREE AIR COMPRESSOR  
CT36073

- MANOMETER
- VARIABLE PRESSURE
- PRESSURE PROTECTION
- TEMPERATURE PROTECTION



1.5 HP

TYRE INFLATORS  
CT38150

- 1/4" THREAD OF AIR CONNECTOR



0÷12 bar

RATED INPUT VOLTAGE	230 V
RATED SPEED	2800 MIN <sup>-1</sup>
AIR TANK CAPACITY	9 L
PRODUCTIVITY	193 L/MIN
OPERATING PRESSURE	6-8 BAR
WEIGHT	15,8 KG

HOSE LENGTH	750 MM
WORKING PRESSURE	0-12 BAR
GAUGE PRESSURE RANGE	0-170 PSI
THREAD OF AIR CONNECTOR	1/4"











# CUTTING, GRINDING AND DIAMOND DISCS

## CUTTING DISCS

### METAL

Universal cutting discs for cutting and metal working. **Flat shape.**











								
CADG-MC2522115	●		115	2,5	22,23	80 m/s	13300 min <sup>-1</sup>	10 / 50
CADG-MC2522125	●		125	2,5	22,23	80 m/s	12250 min <sup>-1</sup>	10 / 50
CADG-MC2522180	●		180	2,5	22,23	80 m/s	8500 min <sup>-1</sup>	10 / 50
CADG-MC2522230	●		230	2,5	22,23	80 m/s	6650 min <sup>-1</sup>	5 / 25

## CUTTING DISCS

### INOX

Thin cutting discs for cutting and stainless steel working. **Flat shape.**











								
CADG-SC1022115	●		115	1,0	22,23	80 m/s	13300 min <sup>-1</sup>	10 / 100
CADG-SC1222115	●		115	1,2	22,23	80 m/s	13300 min <sup>-1</sup>	10 / 100
CADG-SC1622115	●		115	1,6	22,23	80 m/s	13300 min <sup>-1</sup>	10 / 100
CADG-SC1022125	●		125	1,0	22,23	80 m/s	12250 min <sup>-1</sup>	10 / 100
CADG-SC1222125	●		125	1,2	22,23	80 m/s	12250 min <sup>-1</sup>	10 / 100
CADG-SC2022125	●		125	2,0	22,23	80 m/s	12250 min <sup>-1</sup>	10 / 100
CADG-SC1922230	●		230	1,9	22,23	80 m/s	6650 min <sup>-1</sup>	10 / 50

## GRINDING DISCS

### METAL

Universal grinding discs for grinding and metal working. **Domed shape.**









								
CADG-MG6022125		●	125	6,0	22,23	80 m/s	12250 min <sup>-1</sup>	5 / 25
CADG-MG6022180		●	180	6,0	22,23	80 m/s	8500 min <sup>-1</sup>	5 / 25
CADG-MG6022230		●	230	6,0	22,23	80 m/s	6650 min <sup>-1</sup>	5 / 25

## DIAMOND CUTTING DISCS

### STONE - CONCRETE - MARBLE

Universal segmented diamond cutting discs. **Dry cutting.**



						
CADD-US22230	230	2,4	22,23	80 m/s	6650 min <sup>-1</sup>	5 / 25




# SABRE SAW BLADES

## SABRE SAW BLADES

### WOOD

3 pcs set Sabre saw blades for complete wood processing. **Made of HCS.**



CTSSP0005	231	45	4,23	5-175	5-174	3

## SABRE SAW BLADES

### METAL

5 pcs set Sabre saw blades for complete metal processing. **Made of BIM.**



CTSSP0002	228	18	1	0,7-3	5-175	5

# SANDING PAPERS AND BASE PLATES FOR ROTARY SANDERS

## SANDING PAPERS

### ROTARY SANDERS

Sanding paper, 8 holes. **Velcro system.**

**MADE IN ITALY**



CAP-R125A40	125	40	50
CAP-R125A60	125	60	50
CAP-R125A80	125	80	50
CAP-R125A120	125	120	50
CAP-R125A180	125	180	50

## SANDING PAPERS

### ROTARY SANDERS

Sanding paper, 17 holes. **Velcro system.**

**MADE IN ITALY**



CAP-R150A40	150	40	50
CAP-R150A60	150	60	50
CAP-R150A80	150	80	50
CAP-R150A120	150	120	50
CAP-R150A180	150	180	50

## BASE PLATES

### ROTARY SANDERS

Base plate for rotary sanders. **Velcro system.**

**MADE IN ITALY**



	Compatible with		Holes N°	
CSP-P13394	CT13394	125	8	1
CSP-P13395	CT13395	150	8	1
CSP-P13560	CT13560V	125	8	1



# SANDING PAPERS AND BASE PLATES FOR ORBITAL SANDERS





## SANDING PAPERS

### ORBITAL SANDERS

Sanding paper, 17 holes. Clamping system.

MADE IN ITALY



	 L mm	 W mm		
CAP-S115280A40	280	115	40	50
CAP-S115280A60	280	115	60	50
CAP-S115280A80	280	115	80	50
CAP-S115280A120	280	115	120	50
CAP-S115280A180	280	115	180	50





# BLADES FOR CIRCULAR SAWS AND PLUNGE SAWS

## BLADES FOR CIRCULAR SAWS

### WOOD

Compatibility: CT15187-165 / CT15188-190 / CT15210-235







	 Ø mm	 mm	 n°	
CAS-WD2420165	165	20	24	1
CAS-WD2420190	190	20	24	1
CAS-WD2430235	235	30	24	1

## BLADES FOR PLUNGE SAWS

### WOOD

Compatibility: CT15134-165



	 Ø mm	 mm	 n°	
CAS-WD5020165	165	20	50	1




# CARBON BRUSHES

## CARBON BRUSHES

### ORIGINAL SPARE PART

Carbon brushes. 2 pcs.

	Compatible with:
CSP-CB01	CT10126C
CSP-CB02	CT11020
CSP-CB03	CT10032
CSP-CB04	CT13307 / CT13308
CSP-CB05	CT12018
CSP-CB06	CT11001
CSP-CB07	CT10049
CSP-CB08	CT15133
CSP-CB09	CT14019X
CSP-CB10	CT15134-165
CSP-CB11	CT15189 / CT15181
CSP-CB12	CT13551-110RSV
CSP-CB13	CT13502-115R / CT13502-125R
CSP-CB14	CT15187-165 / CT15188-190
CSP-CB15	CT18108
CSP-CB16	CT10128C / CT10128
CSP-CB17	CT10129 / CT10129C / CT10130C
CSP-CB18	CT13501-115R
CSP-CB19	CT13489-230S
CSP-CB20	CT15210-235
CSP-CB21	CT13500-180S / CT13500-230S
CSP-CB22	CT15212
CSP-CB23	CT13507-150
CSP-CB24	CT17010V-A
CSP-CB25	CT13506-125V
CSP-CB26	CT13499-115R / CT13499-125R CT13497-115R / CT13497-125R
CSP-CB27	CT10148

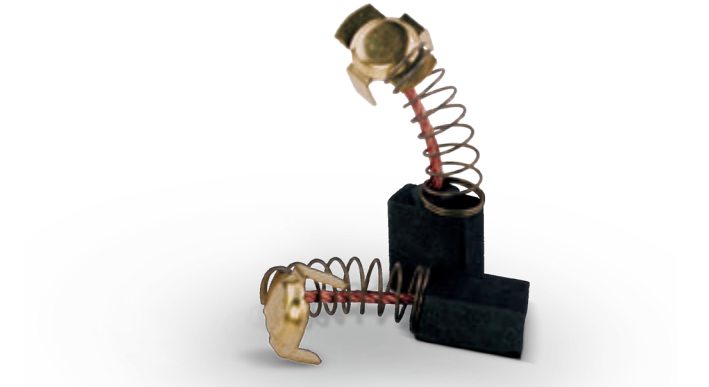

CSP-CB28	CT10113
CSP-CB29	CT10151
CSP-CB30	CT10152F
CSP-CB31	CT13394
CSP-CB32	CT13395
CSP-CB33	CT13560V
CSP-CB34	CT13588V
CSP-CB35	CT15232
CSP-CB36	CT18116 BMC
CSP-CB37	CT18118V BMC
CSP-CB38	CT18123V BMC
CSP-CB39	CT18124 BMC
CSP-CB40	CT18173M BMC
CSP-CB41	CT18180 BMC
CSP-CB42	CT42020
CSP-CB43	CT42022
CSP-CB44	CT42024
CSP-CB45	CT13302
CSP-CB46	CT13302
CSP-CB47	CT18190
CSP-CB48	CT13587
CSP-CB49	CT13528
CSP-CB50	CT11023S
CSP-CB51	CT13070
CSP-CB52	CT13295



## This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



**MERIT LINK**

Hardware tools and equipment

**| Merit Link International AG**

Via Giulia 25/A  
CH-6855 Stabio  
Switzerland

For more information visit  
[www.crown-tools-eu.com](http://www.crown-tools-eu.com)



**Distributed by:**

